



Muro

Contemporary luminaire, ideal for stairwells, corridors & circulation areas.

Fabricated steel chassis with thermoformed PETG diffusion wings.

- RAL9016M as standard, other RAL colours available on request.
- Efficacy of upto 111 lm/W
- IP20
- Suitable for surface mounting on walls and ceilings.
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee



Product Code Builder

Type	Description	Code
Product	Muro	MURO
Size	320 x 320	300
	470 x 470	450
	620 x 620	600
Colour Temperature	Warm White	3K
	Neutral White	4K
	Cool White	6K
Dimming Options	Fixed Output	FO
	Dali	A1
	DSI	A2
	Switch Dim	A3
	1-10v	A4
Emergency	Casambi	A5
	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: MURO 300 3K FO EM3



Muro

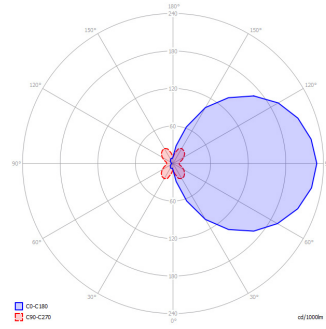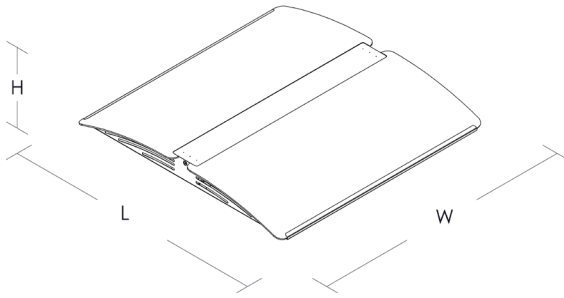

Muro 300

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
Muro 300	320 x 320 x 50	14	1460	104	4000K	>80	SDCM 2	>75K
Muro 450	470 x 470 x 55	20	2219	111	4000K	>80	SDCM 2	>75K
Muro 600	620 x 620 x 60	27	3010	111	4000K	>80	SDCM 2	>75K