


NL


Decorative accent luminaire

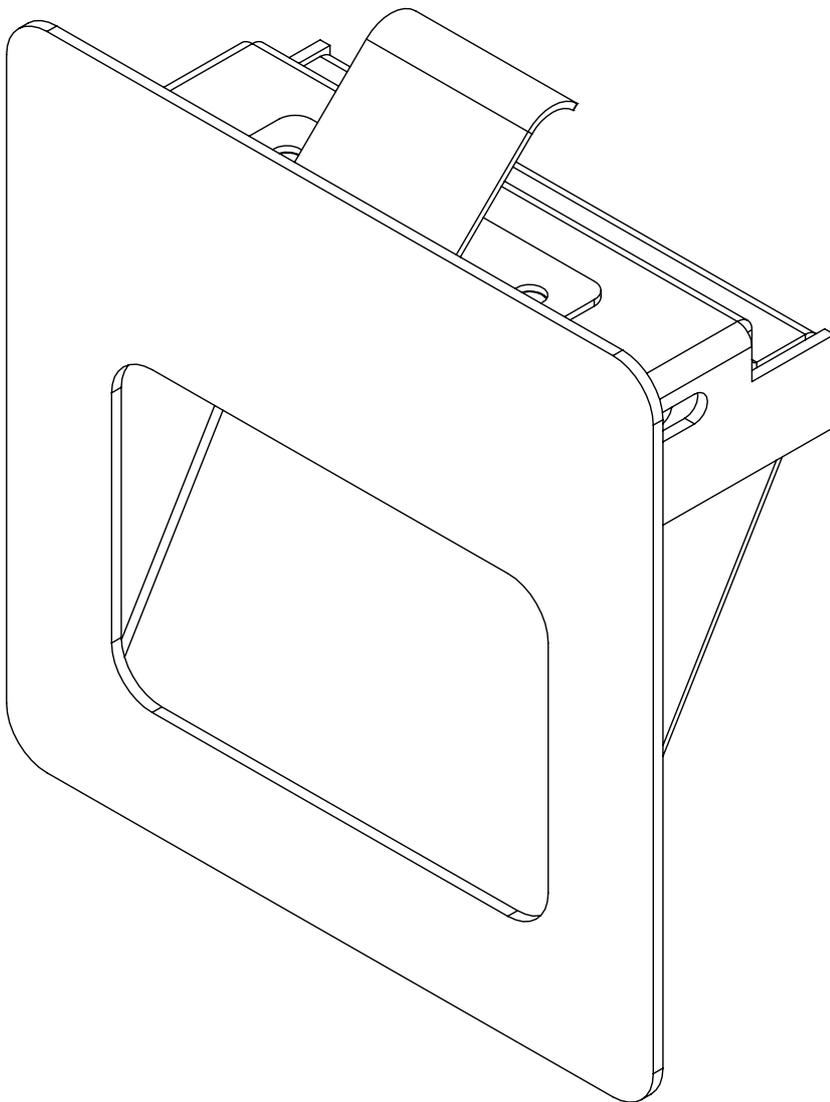

P&A


As Standard

- Luminaire.
- Fly lead + Remote Gear
- Please check thoroughly before installing and report any missing components.

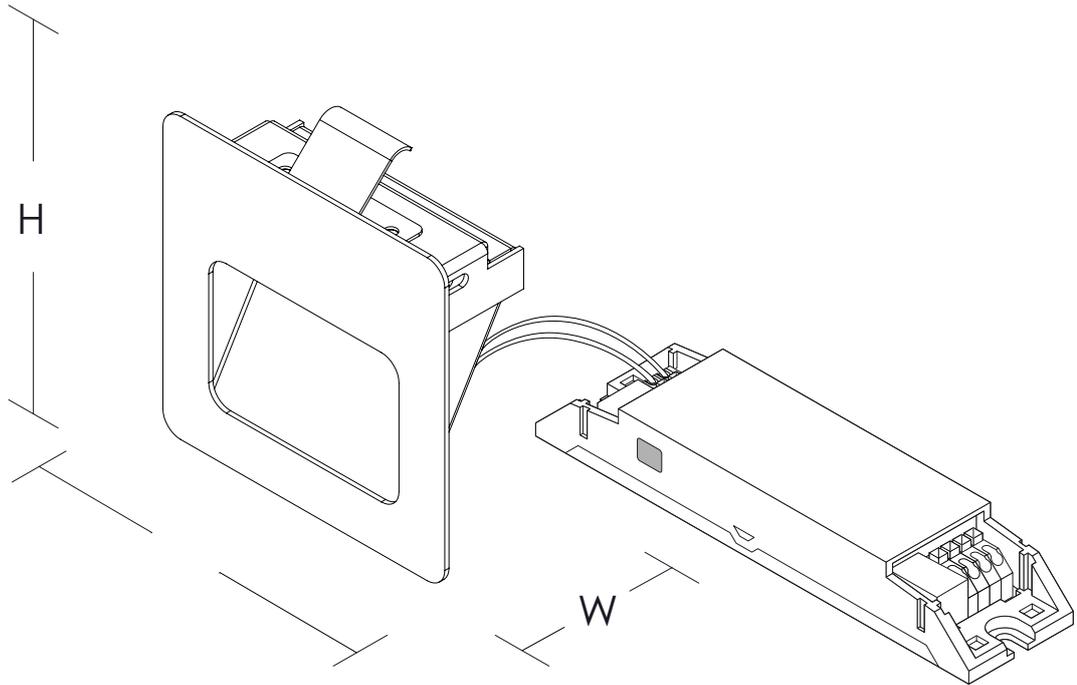


Nominal Dimensions			
Products			
	<i>L</i>	<i>W</i>	<i>H</i>
NL	80	30	80


- 1** Please cut-out 63 x 63mm square hole in desired surface. Please ensure wall void depth is 30mm (Minimum).

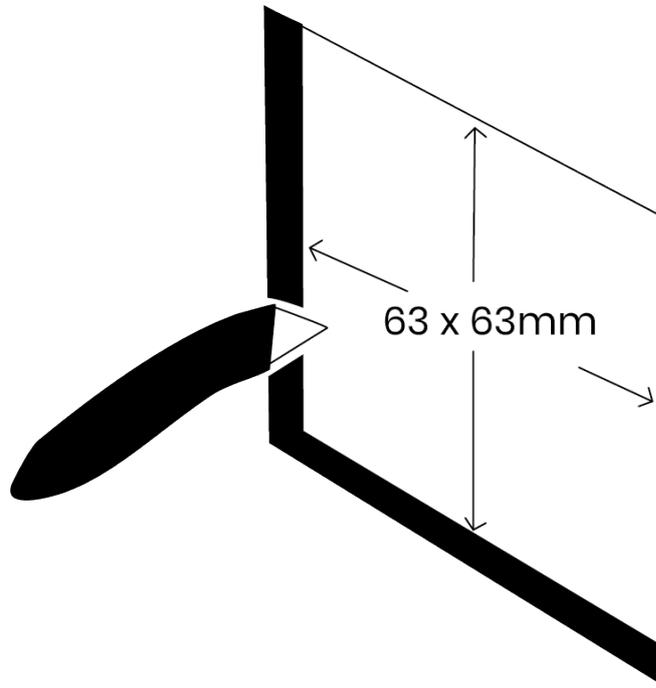


- 2** Feed Incoming supply (provided by others) through ceiling cut-out and connect into driver (See page 6 for wiring diagrams). Re Attach strain relief cover.

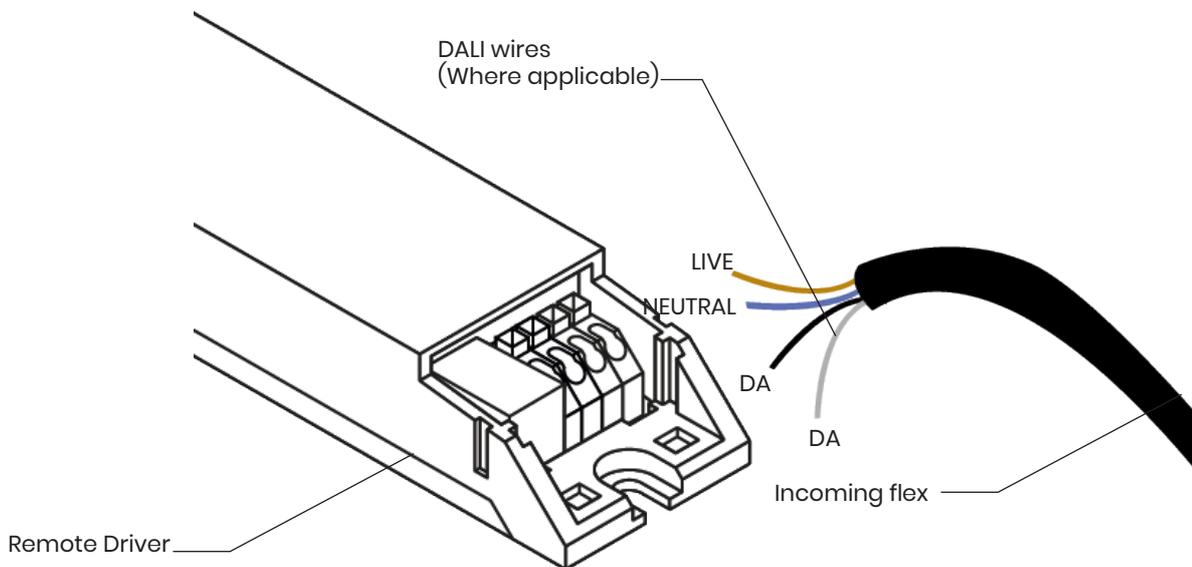


3 Feed driver through wall cut out.

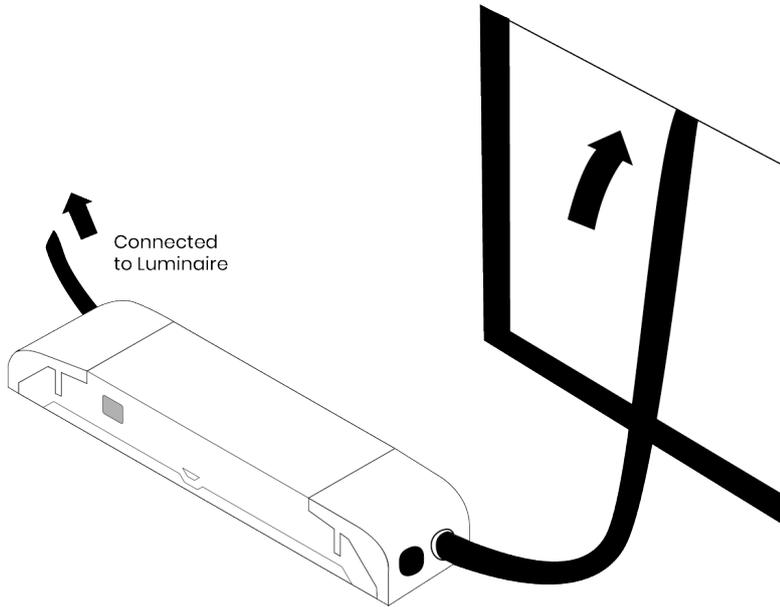

4 Offer up NL luminaire to void cut-out. **A.** Push/fold 2 x springs backward, **B.** Push luminaire through cutout, please ensure no wires are trapped.

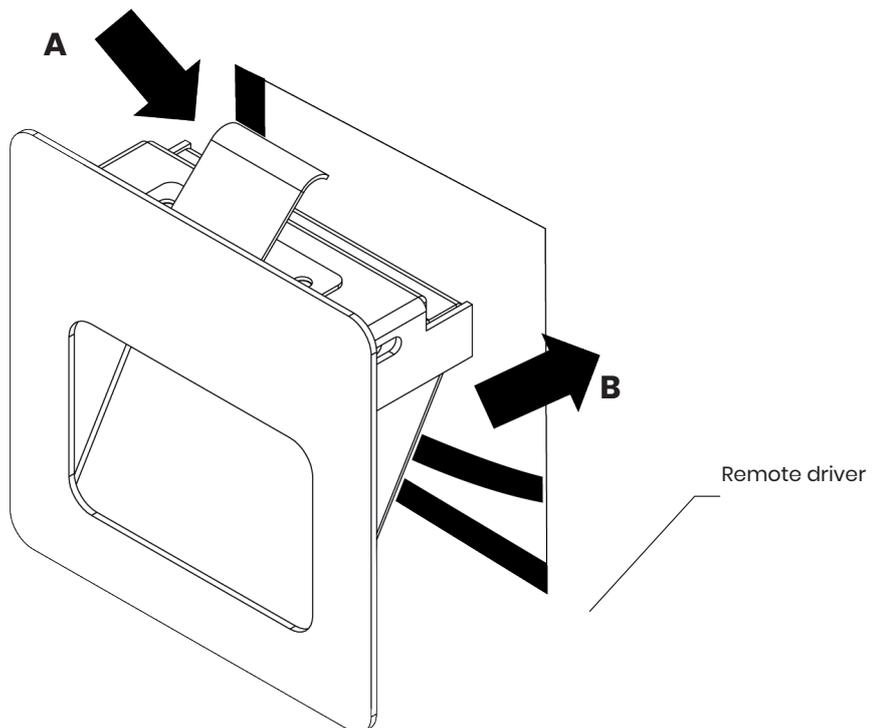


5 Completed Installation (front view).

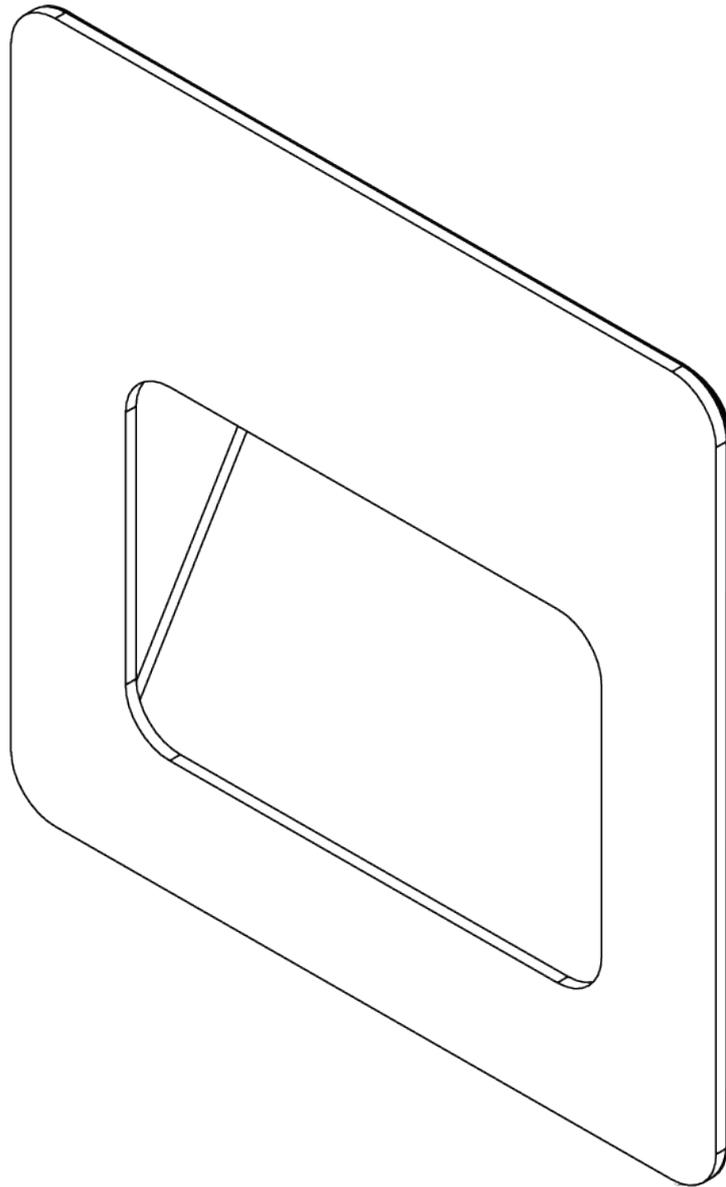


A Fixed Output.

- Live
- Neutral

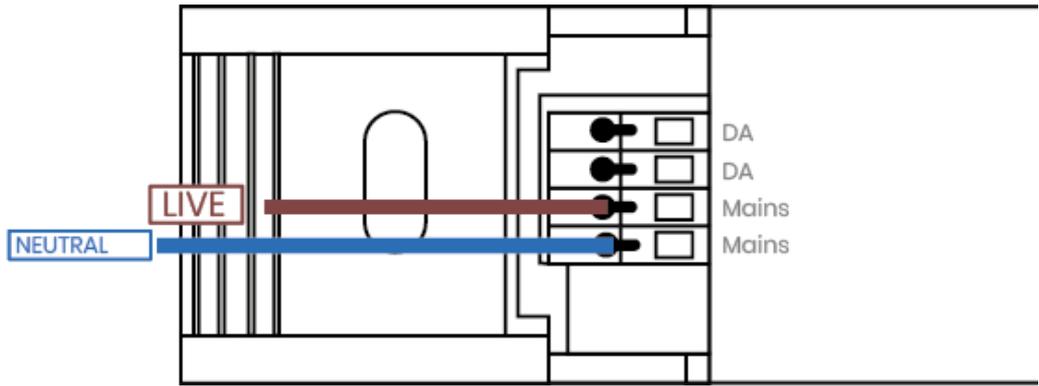

B DALI Wiring.

- DALI
- DALI
- LIVE
- NEUTRAL

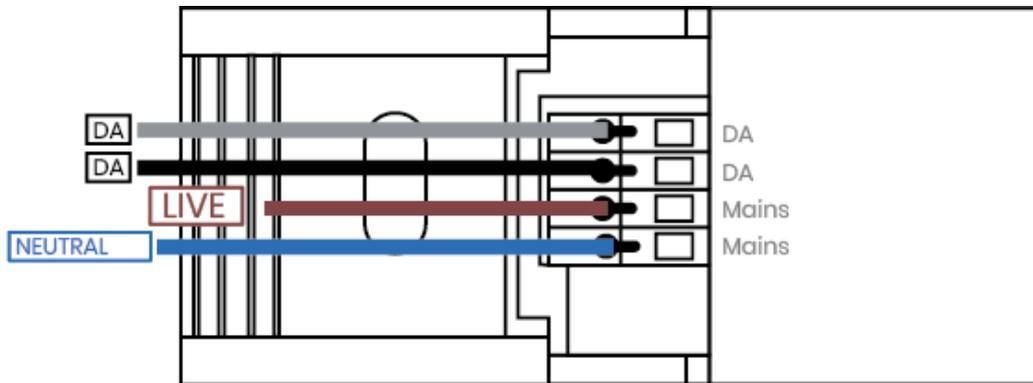

NOTES

Safety

- This luminaire should be installed by a qualified electrician in compliance with IEE regulations.
- Please ensure mains supply to luminaire is disconnected before installation or maintenance.
 - The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Ratings

- This luminaire is designed to operate at 230VAC
-6% +10% 216v to 252v.
DO NOT OPERATE OUTSIDE THIS RANGE.
- This luminaire is only suitable for installation within its rated ingress Protection limits.

Subject to change without notice. Errors and omission excepted.
Always make sure to use the most recent release.



CROWN HOUSE, PLANTATION RD,
BURSCOUGH, LANCASHIRE. L40 8JT
01704 891 333
www.pandaprojects.co.uk