



PAE-ACC

Self-contained non-maintained emergency downlight supplied with wide area & corridor distribution lenses as standard.

- Surface or Recessed mounting.
- Discreet appearance.
- Finished in white or black fire retardant plastic
- Supplied with a clip-in wide angle lens or asymmetric corridor lens
- Automatic Self-Test or DALI as standard
- Lithium Iron Phosphate (LiFe) battery
- 3 watt high power LED

Product Code Builder

Type	Description	Code
Product	PAE-ACC	ACC
Beam	Wide	W
	Corridor	C
Bezel Colour	White	W
	Black	B
Mounting	Recessed	R
	Surface	S
Emergency	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: PAE-ACC W B R EM3





Black Finish




Internal Components



PAE-ACC

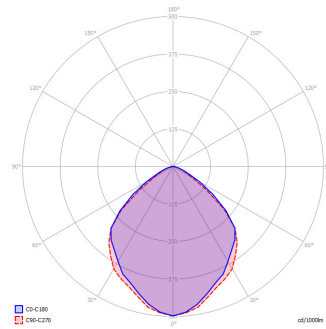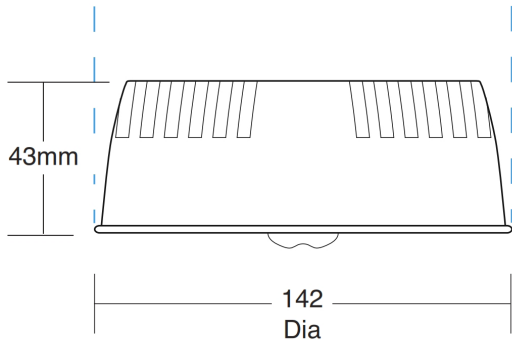

Open Area

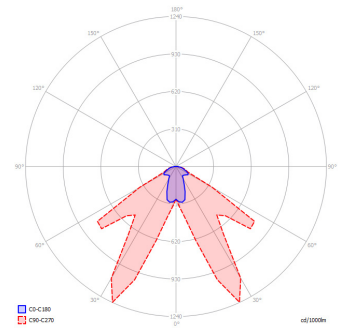

Corridor Beam

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAE-ACC	142 x 142 x 43	<3	260	-	4000K	-	-	-

Mounting height Hm (m)	Corridor		Wide	
	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape
2	n/a	14.0	13.9	12.8
2.5	n/a	15.3	15.1	14.0
3	n/a	16.5	14.8	13.6