



# PAE-BRI

Compact bulkhead IP65 LED emergency exit luminaire, suitable for both indoor and outdoor applications.

Polycarbonate housing and lens specifically designed to maximise distribution.

- White finished polycarbonate with clear diffuser.
- IP65 Rated, suitable for external applications.
- Various dimming options, including DALI, Switch Dim etc.
- 5 Year Guarantee

## Product Code Builder



Type	Description	Code
Product	PAE-BRI	BRI
Attachment	No Attachment	NA
	Blade Sign	BS
	Arrow Right	AR
Sign Legends	Arrow Left	AL
	Arrow Down	AD
	Arrow Up	AU
Emergency	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

**Example Code:** PAE-BRI BS AR EM3





# PAE-BRI

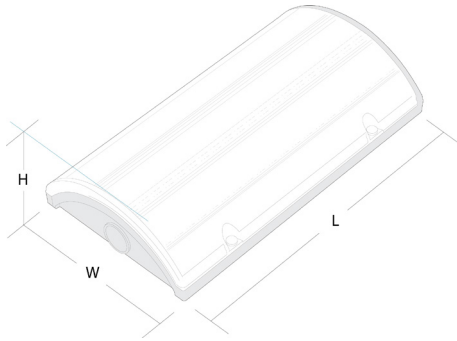

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAE-BRI	240 x 130 x 50	-	120	-	4200K	>80	-	-

Mounting height Hm (m)	Trans. to wall		Trans. to trans		Axial to trans.		Axial to axial		Axial to wall	
	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape
2.5	5.1	3.0	9.8	7.8	9.2	7.2	6.5	6.8	2.6	2.0
4	4.4	2.4	10.0	8.2	9.8	7.6	6.0	6.2	2.2	1.4