



# PAEX-PCC

PAEX-PCC is designed to replace HID lighting systems of up to 175W MH or HPS.

Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

- RAL9005 as standard, other RAL colours available on request.
- Efficacy of upto 113 lm/W
- IP66 Sealed LED Compartment.
- Mounting heights from 12 to 25 feet.
- Various dimming options, including DALI, Switch Dim etc.
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee




## Product Code Builder

Type	Description	Code
Product	PAEX-PCC	PCC
Delivered Output lms	3400	3400
	4600	4600
	5500	5500
	8200	8200
	9300	9300
Colour Temperature	Warm White	3K
	Neutral White	4K
	Cool White	6K
Options	Single Fuse	SF
	Double Fuse	DF
	Surge Protection	SP
	Photocell Receptacle	R3
	Photocell 120VAC	PC1
	Photocell 250+VAC	PC2
	Sensor	S23
	Battery Backup	BU
Dimming Options	Fixed Output	FO
	Dali	A1
	DSI	A2
	Switch Dim	A3
	1-10v	A4
	Casambi	A5

**Example Code:** PCC 3400 3K SF FO



# PAEX-PCC

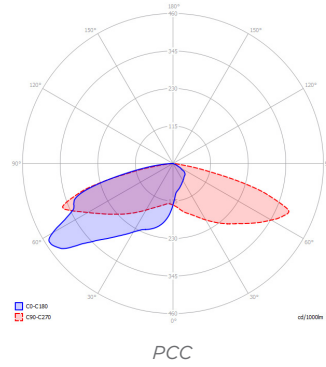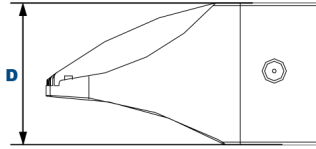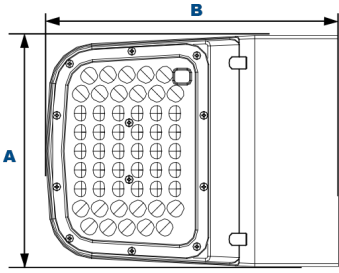

Product	A x B x D (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAEX-PCC	220 x 280 x 146	28	3424	122	4000K	>80	SDCM 2	>600K
PAEX-PCC	220 x 280 x 146	42	4604	110	4000K	>80	SDCM 2	>600K
PAEX-PCC	220 x 280 x 146	50	5543	111	4000K	>80	SDCM 2	>600K
PAEX-PCC	220 x 280 x 146	73	8237	113	4000K	>80	SDCM 2	>600K
PAEX-PCC	220 x 280 x 146	84	9278	110	4000K	>80	SDCM 2	>600K