



# PAR-IP54

PAR-IP54 is a sealed modular luminaire for use in clean room and industrial environments. Also available in a IP65 variant.


Sheet steel construction with gasket sealed front frame. LG7 Compliant, UGR <19 when fitted with prismatic glare control diffuser

- Suitable for 15mm exposed T ceilings as standard, other types on request
- RAL9016M as standard, others available on request
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee

## Product Code Builder

Type	Description	Code
Product	PAR-IP54	IP54R
Delivered Output lms	2150 (600mm)	2150
	3850 (600mm)	5300
	4100 (1200mm)	4000
	5940 (1200mm)	6000
Colour Temperature	Warm White	3K
	Neutral White	4K
	Cool White	6K
Optic	OPAL	OP
	UGR19	MP
Dimming Options	Fixed Output	FO
	Dali	A1
	DSI	A2
	Switch Dim	A3
	1-10v	A4
Emergency	Casambi	A5
	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

**Example Code:** IP54R 2150 3K OP FO EM3

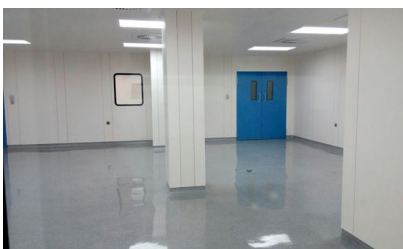



IP65 Clean room installation



IP65 Slab Ceiling installation.



# PAR-IP65

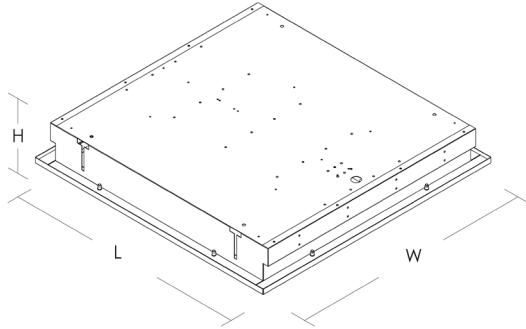

PAR-IP65

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
<b>PAR-IP65 3500</b>	595 x 595 x 110	16.7	2150	131	4000K	>80	SDCM 2	>75K
<b>PAR-IP65 5300</b>	595 x 595 x 110	31	3850	124	4000K	>80	SDCM 2	>75K
<b>PAR-IP65 123 4000</b>	1200 x 300 x 110	29	4100	141	4000K	>80	SDCM 2	>75K
<b>PAR-IP65 123 6000</b>	1200 x 200 x 110	44	5940	135	4000K	>80	SDCM 2	>75K