



PAS-CLD

Surface Mounted Pendant Luminaire with a Drop Diffuser

- RAL9016M or RAL9005M as standard, other colours available on request.
- Efficacy of upto 136 lm/W
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee

Product Code Builder

Type	Description	Code
Product	PAS-CLD	CLD
Size	310 x 310	300
	610 x 610	600
Colour Temperature	Warm White	3K
	Neutral White	4K
	Cool White	6K
Optic	Opal	OP
	Fixed Output	FO
Dimming Options	Dali	A1
	DSI	A2
	Switch Dim	A3
	1-10v	A4
	Casambi	A5
Emergency	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: CLD 300 3K OP FO EM3





600 x 600



300 x 300



PAS-CLD

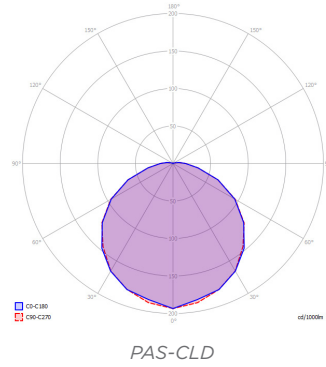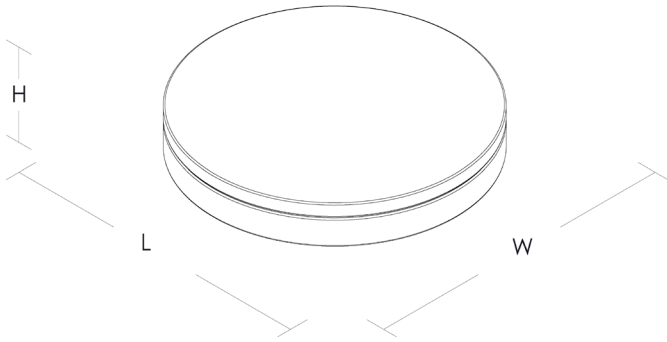

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAS-CLD 300	310 x 310 x 77	18	2150	119	4000K	>80	SDCM 2	>75K
PAS-CLD 600	610 x 610 x 77	39	5310	136	4000K	>80	SDCM 2	>75K