



# PAS-VR

PAS-VR is a surface mount, anti-vandal, anti-ligature luminaire.

Heavy duty fabricated steel housing fitted with high impact polycarbonate diffuser.

- RAL9016 as standard, other RAL colours available on request.
- Efficacy of upto 137 lm/W
- For surface mounting on walls & ceilings, (Anti-ligature only when ceiling mounted & installed with anti-pick mastic).
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee



## Product Code Builder

Type	Description	Code
Product	PAS-VR	VR
Delivered Output lms	3562 (1200mm)	12-3500
	4800 (1200mm)	12-4800
	6339 (1200mm)	12-6300
	4438 (1500mm)	15-4400
	6035 (1500mm)	15-6000
Colour Temperature	7908 (1500mm)	15-7900
	Warm White	3K
	Neutral White	4K
Dimming Options	Cool White	6K
	Fixed Output	FO
	Dali	A1
	DSI	A2
	Switch Dim	A3
Emergency	1-10v	A4
	Casambi	A5
	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

**Example Code:** VR 12 3500 3K FO EM3



# PAS-VR

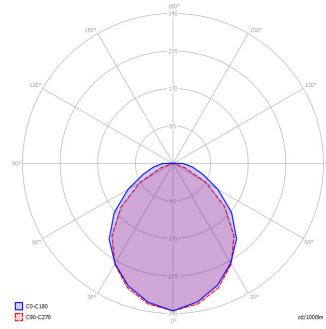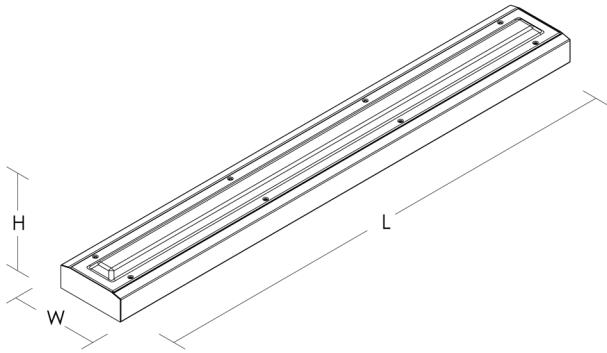

PAS-VR-15-7900

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
VR-12 - 3500	1200 x 160 x 72	26	3562	137	4000K	>80	SDCM 2	>75K
VR-12 - 4800	1200 x 160 x 72	38	4800	126	4000K	>80	SDCM 2	>75K
VR-12 - 6300	1200 x 160 x 72	57	6339	111	4000K	>80	SDCM 2	>75K
VR-12 - 4400	1500 x 160 x 72	33	4438	134	4000K	>80	SDCM 2	>75K
VR-12 - 6000	1500 x 160 x 72	48	6035	125	4000K	>80	SDCM 2	>75K
VR-12 - 7900	1500 x 160 x 72	72	7908	110	4000K	>80	SDCM 2	>75K