



PAS-VRC

PAS-VRC is a cornice mount, anti-vandal, anti-ligature luminaire.

Heavy duty fabricated steel housing fitted with high impact polycarbonate diffuser.

- RAL9016 as standard, other RAL colours available on request.
- Efficacy of upto 137 lm/W
- For cornice mounting on walls & ceilings, (Anti-ligature only installed with anti-pick mastic).
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee



Product Code Builder

Type	Description	Code
Product	PAS-VRC	VRC
Delivered Output lms	3562 (1200mm)	12-3500
	4800 (1200mm)	12-4800
	6339 (1200mm)	12-6300
	4438 (1500mm)	15-4400
	6035 (1500mm)	15-6000
Colour Temperature	7908 (1500mm)	15-7900
	Warm White	3K
	Neutral White	4K
Dimming Options	Cool White	6K
	Fixed Output	FO
	Dali	A1
	DSI	A2
	Switch Dim	A3
Emergency	1-10v	A4
	Casambi	A5
	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: VRC 12 3500 3K FO EM3



PAS-VRC

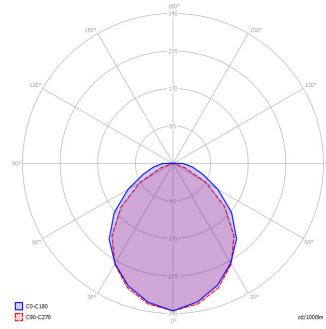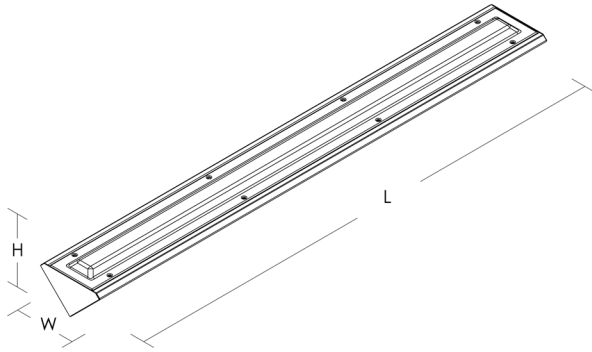

PAS-VRC 15 7900

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
VRC-12 - 3500	1200 x 160 x 72	26	3562	137	4000K	>80	SDCM 2	>75K
VRC-12 - 4800	1200 x 160 x 72	38	4800	126	4000K	>80	SDCM 2	>75K
VRC-12 - 6300	1200 x 160 x 72	57	6339	111	4000K	>80	SDCM 2	>75K
VRC-12 - 4400	1500 x 160 x 72	33	4438	134	4000K	>80	SDCM 2	>75K
VRC-12 - 6000	1500 x 160 x 72	48	6035	125	4000K	>80	SDCM 2	>75K
VRC-12 - 7900	1500 x 160 x 72	72	7908	110	4000K	>80	SDCM 2	>75K