



PAWR-NL

Recessed high efficiency wall luminaire perfect for use as a night light or for decorative applications.

- RAL9016 as standard, other RAL colours available on request.
- Efficacy of upto 128 lm/W
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 5700K
- 5 Year Guarantee





Product Code Builder

Type	Description	Code
Product	PAWR-NL	NL
Delivered Output lms	282	300
	553	550
	Warm White	3K
Colour Temperature	Neutral White	4K
	Cool White	5.7K
	Fixed Output	FO
Dimming Options	Dali	A1
	DSI	A2
	Switch Dim	A3
	1-10v	A4
	Casambi	A5
Emergency	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: NL 300 3K FO EM3



PAWR-NL

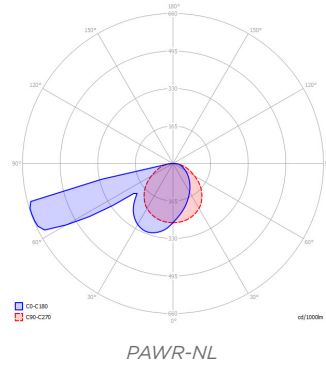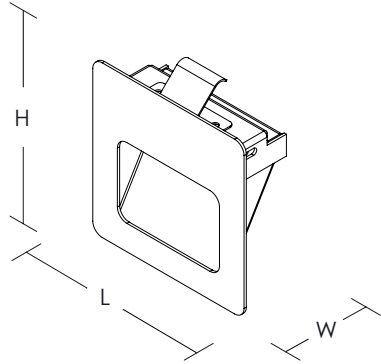

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAWR-NL	80 x 30 x 80	2.2	282	128	4000K	>80	SDCM 2	>75K
PAWR-NL HO	80 x 30 x 80	4.4	553	126	4000K	>80	SDCM 2	>75K