



PAE-SLD

Attractive LED exit sign luminaire with surface mount, suspended and recessed options available.

15 x high brightness LEDs providing a 28m viewing distance and a typical life expectancy of over 50,000 hours.

- Textured White as standard, also available in silver/grey.
- Supplied with integral maintained 3 hour emergency as standard.
- DALI/Self-Test Emergency also available.
- Various legends to choose from.
- 5 Year Guarantee

Product Code Builder

Type	Description	Code
Product	PAE-SLD	SLD
	Surface	SUR
	Suspended	SUS
Mounting	Recessed	REC
	White	W
Colour	Silver	S
	Up Arrow	UA
Legend	Down Arrow	DA
	Left Arrow	LA
	Right Arrow	RA
	Standard 3 hour	EM3
Emergency	DALI/EMPRO	EMD
	Self Test	EMS

Example Code: PAE-SLD SUS W UA EM3




Suspension Mounted



Recessed Mounted



PAE-SLD

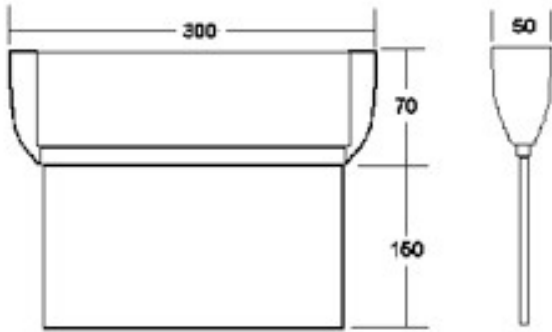

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAE SLD	300 x 220 x 50	4.5	-	-	4000K	>80	SDCM 2	>50K
PAE SLD R	355 x 216 x 112	4.5	-	-	4000K	>80	SDCM 2	>50K