



# PAP-GLOBE

Pendant luminaire for decorative and general lighting.

## Opal Globe

- Available in 300, 400mm, 500mm diameter.
- Efficacy of upto 100lm/W
- Supplied in PMMA or PC
- Supplied with conical ceiling cup & suspension wires
- Various dimming options, including DALI, Switch Dim ect.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee


## Product Code Builder

Type	Description	Code
Product	GLOBE	PAP-GL
Diameter	300mm	3
	400mm	4
	500mm	5
Colour Temperature	Warm White	3K
	Neutral White	4K
	Cool White	6K
Optic	PMMA	AC
	Polycarbonate	PC
Dimming Options	Fixed Output	FO
	Dali	A1
	DSI	A2
Emergency	Switch Dim	A3
	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS


**Example Code:** PAP-GL-4-3K-AC-A1-EMD



# PAP-Globe

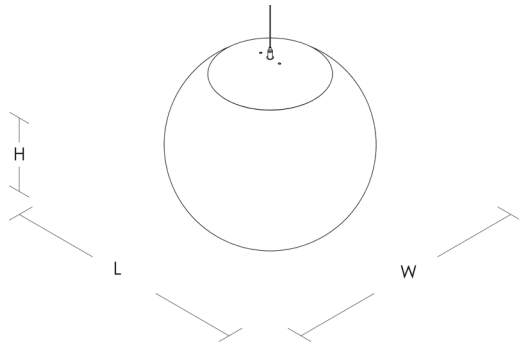

Ceiling Canopy



Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAP-GL-300	300x300x300	20	2000	100	4000K	>80	SDCM 2	>75K
PAP-GL-400	400x400x400	30	3000	100	4000K	>80	SDCM 2	>75K
PAP-GL-500	500x500x500	40	4000	100	4000K	>80	SDCM 2	>75K