



# PAW-CRV

Slimline linear wall mounted luminaire. High quality design providing LED up/downlight illumination.

Extruded aluminium housing with snap in opal PMMA diffuser

- RAL906 as standard, other RAL colours available on request.
- Efficacy of upto 95 lm/W
- Available in 300mm, 600mm and 900mm sizes.
- Various dimming options, including DALI, Switch Dim etc.
- Emergency options available
- Range of colour temperatures 3000K, 4000K & 6000K
- 5 Year Guarantee



## Product Code Builder

Type	Description	Code
Product	PAW-CRV	CRV
Size	300mm	300
	600mm	600
	900mm	900
Colour Temperature	Warm White	3K
	Neutral White	4K
	Cool White	6K
Dimming Options	Fixed Output	FO
	Dali	A1
	DSI	A2
	Switch Dim	A3
	1-10v	A4
	Casambi	A5
Emergency	Standard 3 hour	EM3
	DALI/EMPRO	EMD
	Self Test	EMS

**Example Code:** CRV 300 3K FO EM3



# PAW-CRV

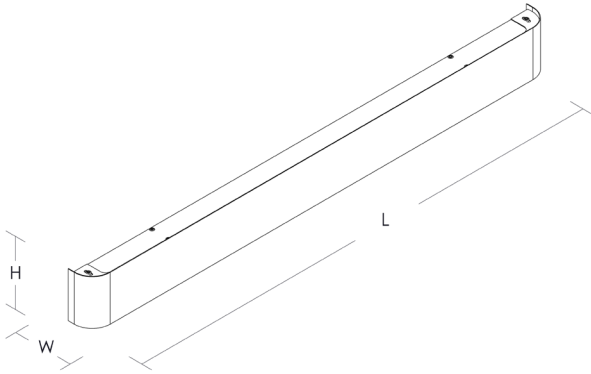

PAW-CRV 900

Product	L x W x H (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAW-CRV 300	362 x 46 x 90	14	1251	89	4000K	>80	SDCM 2	>75K
PAW-CRV 600	642 x 46 x 90	27	2544	94	4000K	>80	SDCM 2	>75K
PAW-CRV 900	922 x 46 x 90	40	3795	95	4000K	>80	SDCM 2	>75K