



PAEX-PCC

PAEX-PCC is designed to replace HID lighting systems of up to 175W MH or HPS.

Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

- RAL9005 as standard, other RAL colours available on request.
- Efficacy of upto 122 lm/W
- IP66 Sealed LED Compartment.
- Mounting heights from 12 to 25 feet.
- Various dimming options, including DALI, Switch Dim etc.
- Range of colour temperatures 3000K, 4000K & 5000K
- 5 Year Guarantee




Product Code Builder

Type	Description	Code
Product	PAEX-PCC	PCC
Delivered Output lms	3400	3400
	4600	4600
	Warm White	3K
Colour Temperature	Neutral White	4K
	Cool White	5K
	Single Fuse	SF
Options	Double Fuse	DF
	Surge Protection	SP
	Photocell Receptacle	R3
	Photocell 120VAC	PC1
	Photocell 250+VAC	PC2
	Sensor	S23
	Battery Backup	BU
	Fixed Output	FO
Dimming Options	Dali	A1
	DSI	A2
	Switch Dim	A3
	1-10v	A4
	Casambi	A5

Example Code: PCC 3400 3K SF FO



PAEX-PCC

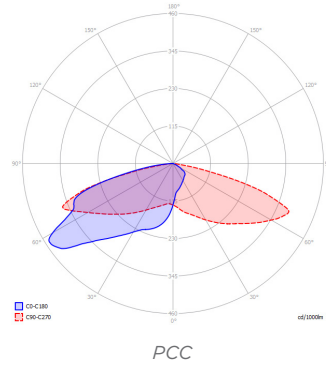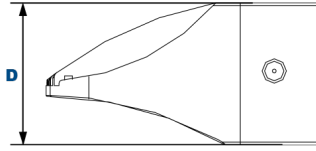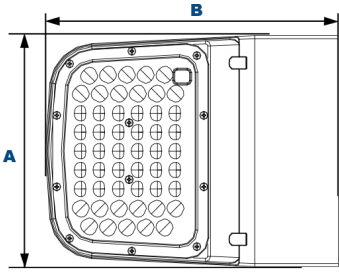

Product	A x B x D (mm)	Ctt Watts	Luminaire / Lumens	LL / CW	Colour Temp	Ra	Colour Consistency	L70 / B10
PAEX-PCC	220 x 280 x 146	28	3420	122	4000K	>80	SDCM 2	>600K
PAEX-PCC	220 x 280 x 146	42	4599	110	4000K	>80	SDCM 2	>600K