


PAP-DRM

Surface/Suspended

PAP-DRM is an architectural feature luminaire, supplied as either surface or wire suspended. Manufactured from spun aluminium, it is available in 300mm, 500mm, 700mm and 900mm diameters. Supplied as standard with direct/indirect distribution, in a range of outputs to suit your needs

- Efficacy of up to 148 lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi or Bluetooth.
- Suspended Luminaire supplied complete with individual wire suspensions, which are adjustable up to 3m length as standard*.
- Custom length wire suspension, Clear, Black or White flex are also available.
- Emergency options: Standard 3hr, Self-Test or Dali addressable.



Technical

Product	PAP-DRM
Mounting type	Surface Suspended
Diameters	300-900mm
Lumens	1512 - 12920lm
Efficacy	Upto 148 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Bluetooth
Emergency	3 hour, DALI, Self-Test
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>50K

* Central single point fixing via ceiling rose available as additional item – see ancillaries.

Surface mounted version shown above

Luminaire Order Builder

DRM3 (300mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
SF Surface	30 300mA 1512Lm -12.9W	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	35 350mA 1764Lm- 15W	4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
	40 400mA 2016Lm - 17W		A2 DSI	S RAL9006	ES Self-Test
	45 450mA 2268Lm- 19.8W		A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

Example Code: DRM3-WS-35-4K-A1-W-E3

DRM5 (500mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
SF Surface	45 450mA 3657 Lm -35W	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	57 575mA 4672 Lm- 44.8W	4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
			A2 DSI	S RAL9006	ES Self-Test
			A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

All electrical and optical data subject to ±10% tolerances.
Values based on 4000K Colour temperature.

Example Code: DRM5-WS-57-4K-A1-W-E3

Luminaire Order Builder

DRM7 (700mmØ)

STEP 1. Select Mounting	STEP 1. Select Current	STEP 2. CCT	STEP 3. Control	STEP 4. Finish	STEP 5. Emergency
SF Surface	57 575mA 4672Lm - 44.8W	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	70 700mA 5691Lm - 54.5W	4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
			A2 DSI	S RAL9006	ES Self-Test
			A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

Example Code: DRM7-WS-70-4K-A1-W-E3


DRM9 (900mmØ)

STEP 1. Select Mounting	STEP 1. Select Current	STEP 2. CCT	STEP 3. Control	STEP 4. Finish	STEP 5. Emergency
SF Surface	45 450mA 8269Lm - 56W	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	72 725mA 12920Lm - 93W	4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
			A2 DSI	S RAL9006	ES Self-Test
			A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

All electrical and optical data subject to ±10% tolerances.
Values based on 4000K Colour temperature.

Example Code: DRM9-WS-45-4K-A1-W-E3

P&A PAP-DRM

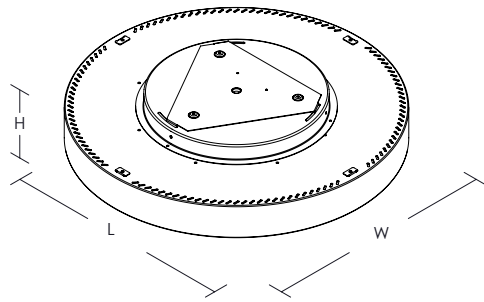

Surface mounted version shown above



Dimensions

L	W	H	RAL	Code	Colour Swatch
300	300	80	White	9016M	
500	500	80	Black	9005	
700	700	80	Silver	9006	
900	900	80	Custom*	Custom*	

Finish

All dimensions are measured in millimetres (mm)

*Custom Colours upon request

Ancillaries

Wire Suspensions	Code	Ancillaries images
3m Wire suspension kit	DRM-WS-3M	3m Wire suspension kit
Custom length (1m increments)	DRM-WS-ZM	Decorative Ceiling Rose, with 6 Way Wago terminal.

Clear 0.75mm², Supply Cable

3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-ZM
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-ZM
6 core, Clear, 3m	FL-6C-C-3M
6 core, Clear, Custom Length*	FL-6C-C-ZM

Black 0.75mm², Supply Cable

3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-ZM
5 core, Black, 3m	FL-5C-B-3M
5 core, Black, Custom Length*	FL-5C-B-ZM
6 core, Black, 3m	FL-6C-B-3M
6 core, Black, Custom Length*	FL-6C-B-ZM

White 0.75mm², Supply Cable

3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-ZM
5 core, White, 3m	FL-5C-W-3M
5 core, White, Custom Length*	FL-5C-W-ZM
6 core, White, 3m	FL-6C-W-3M
6 core, White, Custom Length*	FL-6C-W-ZM

Decorative Ceiling Rose, with 6 Way Wago terminal (c/w central hole for single wire suspension fixing).

Silver RAL9006	CR-120-T-S
Black RAL9005	CR-120-T-B
White RAL9016	CR-120-T-W
Custom RAL Colour**	CR-120-T-Z

*Please replace Z with required cut meter length.

**Please replace Z with required Custom RAL Colour.



Distribution Type

Direct/indirect

