




PAP-HEX

Surface/Suspended

PAP-HEX is a hexagonal feature luminaire that can be surface mounted or wire suspended, Available in 500mm, 700mm and 900mm diameter as standard, with direct distribution, in a range of outputs to suit your needs.

- Efficacy of up to 148 lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi or Bluetooth.
- Emergency options: Standard 3hr, Self-Test or Dali addressable.
- Suspended luminaire supplied with adjustable support wires and individual mounting brackets as standard**.
- Custom length wire suspension, Clear, Black or White flex are also available.
- Emergency options: Standard 3hr, Self-Test or Dali addressable.



Technical

Product	PAP-HEX
Mounting	Surface Suspended
Diameters	500-900mm
Lumens	3657 - 12920lm
Efficacy	Upto 148 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Bluetooth.
Emergency	3 hour, DALI, Self-Test
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>54K

** Central single point fixing via ceiling rose available as additional item – see ancillaries.

P&A PAP-HEX

Luminaire Order Builder

HEX5 (500mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
SF Surface	45 450mA 3657 Lm - 35W	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	57 575mA 4672 Lm - 44.8W	4K 4000K	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
			A2 DSI	S RAL9006	ES Self-Test
			A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

Example Code: HEX5-SF-45-4K-A1-W-E3

HEX7 (700mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
SF Surface	57 575mA 4672Lm - 44.8W	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	70 700mA 5691Lm- 54.5W	4K 4000K	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
			A2 DSI	S RAL9006	ES Self-Test
			A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature.

Example Code: HEX7-WS-70-4K-A1-W-E3



P&A PAP-HEX



Luminaire Order Builder

HEX9 (900mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
SF Surface	45 450mA 8269Lm - 56W	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	72 725mA 12920Lm - 93W	4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
			A2 DSI	S RAL9006	ES Self-Test
			A3 Switch Dim	Z Custom	
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature.

Example Code: HEX-SF-45-4K-A1-W-E3

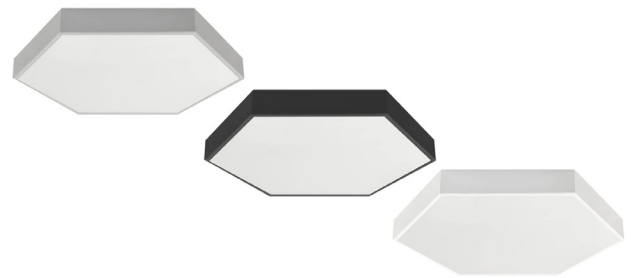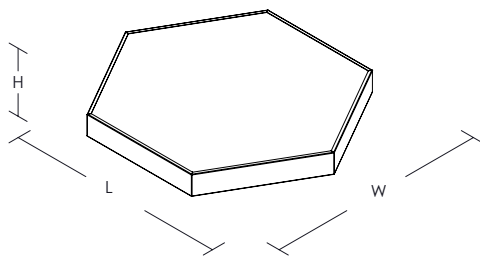

Dimensions

L	W	H	RAL	Code	Colour Swatch
500	435	83	White	9016M	
700	610	83	Black	9005	
900	785	83	Silver	9006	
			Custom*	Custom*	

All dimensions are measured in millimetres (mm)

*Custom Colours upon request



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

Datasheet Code: PA-10504-0

CE BS EN60598-1:2015
ISO 9001 Certification



P&A PAP-HEX

Ancillaries

Wire Suspensions	Code
3m Wire suspension kit	SS50-WS-3M
Custom length (1m increments)	SS50-WS-ZM

Clear 0.75mm², Supply Cable

3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-ZM
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-ZM
6 core, Clear, 3m	FL-6C-C-3M
6 core, Clear, Custom Length*	FL-6C-C-ZM

Black 0.75mm², Supply Cable

3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-ZM
5 core, Black, 3m	FL-5C-B-3M
5 core, Black, Custom Length*	FL-5C-B-ZM
6 core, Black, 3m	FL-6C-B-3M
6 core, Black, Custom Length*	FL-6C-B-ZM

White 0.75mm², Supply Cable

3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-ZM
5 core, White, 3m	FL-5C-W-3M
5 core, White, Custom Length*	FL-5C-W-ZM
6 core, White, 3m	FL-6C-W-3M
6 core, White, Custom Length*	FL-6C-W-ZM

Decorative Ceiling Rose, with 6 Way Wago terminal (c/w central hole for single wire suspension fixing).

Silver RAL9006	CR-120-T-S
Black RAL9005	CR-120-T-B
White RAL9016	CR-120-T-W
Custom RAL Colour**	CR-120-T-Z

*Please replace Z with required cut meter length.

**Please replace Z with required Custom RAL Colour.

Ancillaries images

3m Wire suspension kit



Decorative Ceiling Rose, with 6 Way Wago terminal.



Distribution Type

Direct



IP20

IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 1 Safety chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
5 year Guarantee