




3K 4K 2.7-5.7K

IP20



EM3

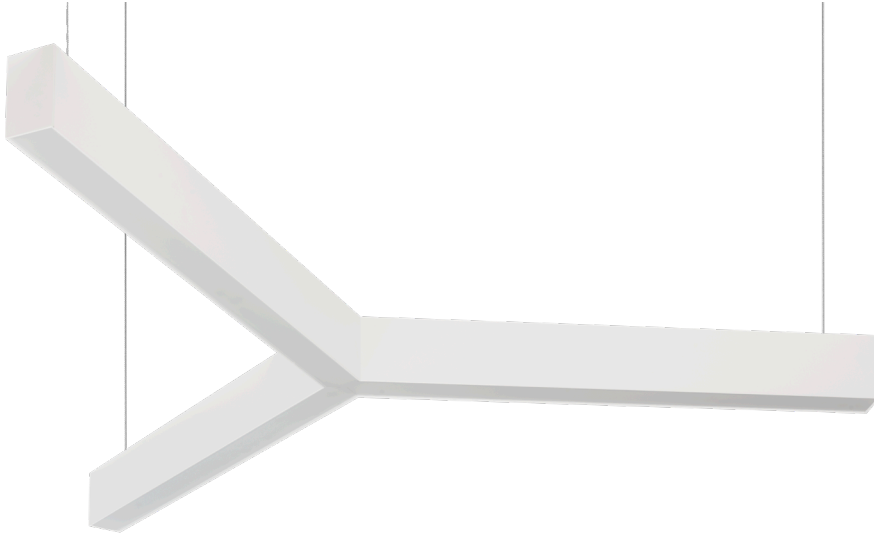


SubSpace Y

Suspended

Subspace Y is a wire suspended Y-shaped luminaire, designed to make an architectural statement within any space. This 50x85mm profile, can be supplied in variety of outputs, optics and colour finishes. Available in sizes of 600mm, 900mm and 1200mm as standard, with direct or direct/indirect distribution.

- Efficacy of up to 144 lm/W.
- LG7 Complaint, UGR<19 (when used with microprism diffuser).
- Colour temperatures: 3000°k, 4000°k or Tuneable White (2700°k -5700°k).
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v, DALI 10-100% Dim.
- Wireless control options: Casambi or Bluetooth.
- Luminaire supplied complete with 3m adjustable wire suspensions and 3m clear supply flex as standard.
- Custom length wire suspension, Clear, Black or White flex are also available.
- Emergency options: Standard 3hr, Self-Test or Dali addressable.
- Integrated PIR available upon request*.

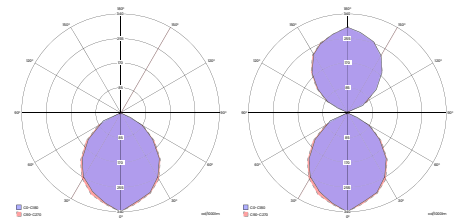

Technical

Product	SubSpace Y
Mounting type	Suspended
Standard Diameters	600-1200mm
Custom Diameters	140mm increments
Lumens	1106 - 8846 Lm
Efficacy	Up to 144 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K) Tunable White (2.7K >5.7K)
Optics	Opal diffuser Microprism (UGR<19)
Control	DALI 1-100%, DSI, 1-10V, Casambi, Bluetooth, Fixed output, DALI 10-100%
Emergency	3 hour, DALI, Self-Test
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>75K

* Please contact P&A Technical Department for assistance

PA SubSpace Y

Luminaire Order Builder

SSY6-WS (600mmØ - Direct)

STEP 1. Select Current	STEP 2. Luminous Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
15 150mA 1106 Lm - 7.7W	D Direct	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
20 200mA 1475 Lm - 10.4W						
25 250mA 1844 Lm - 13.1W						
30 300mA 2212 Lm - 15.8W						
35 350mA 2581 Lm - 18.6W						
40 400mA 2950 Lm - 21.5W						
		M Microprism UGR<19	4K 4000K	A1 DALI	B RAL9005	ED DALI/EMPRO
			TW 2700K - 5700K Tunable white	A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	
				A4 1-10v		
				A5 Casambi		
				A6 Bluetooth		
				A9 DALI 10-100% Dim		

Example Code: SSY6-WS-D-30-O-4K-A1-W-E3

SSY6-WS (600mmØ - Direct/Indirect)

STEP 1. Select Current	STEP 2. Luminous Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
15 150mA 1659 Lm - 11.6W	DI Direct/Indirect	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
20 200mA 2212 Lm - 15.6W						
25 250mA 2765 Lm - 19.6W						
30 300mA 3318 Lm - 23.7W						
35 350mA 3871 Lm - 27.9W						
40 400mA 4425 Lm - 32.1W						
		M Microprism UGR<19	4K 4000K	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
			TW 2700K - 5700K Tunable white	A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	
				A4 1-10v		
				A5 Casambi		
				A6 Bluetooth		
				A9 DALI 10-100% Dim		

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature.

Example Code: SSY6-WS-DI-30-O-4K-A1-W-E3



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

CE BS EN60598-1:2015
ISO 9001 Certification

Datasheet Code: PA-SSY
MADE IN BRITAIN

P&A SubSpace Y

Luminaire Order Builder

SSY9-WS (900mmØ - Direct)

STEP 1. Select Current	STEP 2. Luminous Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
15 150mA 1659 Lm - 11.6W	D Direct	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
20 200mA 2212 Lm - 15.6W						
25 250mA 2765 Lm - 19.6W						
30 300mA 3318 Lm - 23.7W						
35 350mA 3871 Lm - 27.9W						
40 400mA 4425 Lm - 32.1W						
		M Microprism UGR<19	4K 4000K	A1 DALI	B RAL9005	ED DALI/EMPRO
			TW 2700K - 5700K Tunable white	A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	
				A4 1-10v		
				A5 Casambi		
				A6 Bluetooth		
				A9 DALI 10-100% Dim		

Example Code: SSY9-WS-D-30-O-4K-A1-W-E3

SSY9- WS (900mmØ - Direct/Indirect)

STEP 1. Select Current	STEP 2. Luminous Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
15 150mA 2765 Lm - 19.3W	DI Direct/Indirect	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
20 200mA 3687 Lm - 25.9W						
25 250mA 4609 Lm - 32.7W						
30 300mA 5531 Lm - 39.6W						
35 350mA 6452 Lm - 46.5W						
40 400mA 7374 Lm - 53.6W						
		M Microprism UGR<19	4K 4000K	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
			TW 2700K - 5700K Tunable white	A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	
				A4 1-10v		
				A5 Casambi		
				A6 Bluetooth		
				A9 DALI 10-100% Dim		

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature.

Example Code: SSY9-WS-DI-30-O-4K-A1-W-E3



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

CE BS EN60598-1:2015
ISO 9001 Certification

Datasheet Code: PA-SSY
MADE IN BRITAIN

PA SubSpace Y

Luminaire Order Builder

SSY12-WS (1200mmØ - Direct)

STEP 1. Select Current	STEP 2. Luminous Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency	
15 150mA 2211 Lm - 15.4W	D Direct	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour	
20 200mA 2948 Lm - 20.7W							
25 250mA 3685 Lm - 26.1W		M Microprism UGR<19	4K 4000K	TW 2700K - 5700K Tunable white	A1 DALI	B RAL9005	ED DALI/EMPRO
30 300mA 4423 Lm - 31.6W							
35 350mA 5160 Lm - 37.1W							
40 400mA 5897 Lm - 42.8W							
				A2 DSI	S RAL9006	ES Self-Test	
				A3 Switch Dim	Z Custom		
				A4 1-10v			
				A5 Casambi			
				A6 Bluetooth			
				A9 DALI 10-100% Dim			

Example Code: SSY12-WS-D-30-O-4K-A1-W-E3

SSY12- WS (1200mmØ - Direct/Indirect)

STEP 1. Select Current	STEP 2. Luminous Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency	
15 150mA 3317 Lm - 23.1W	DI Direct/Indirect	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour	
20 200mA 4423 Lm - 31.1W							
25 250mA 5529 Lm - 39.2W		M Microprism UGR<19	4K 4000K	TW 2700K - 5700K Tunable white	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
30 300mA 6635 Lm - 47.4W							
35 350mA 7741 Lm - 55.8W							
40 400mA 8846 Lm - 64.3W							
				A2 DSI	S RAL9006	ES Self-Test	
				A3 Switch Dim	Z Custom		
				A4 1-10v			
				A5 Casambi			
				A6 Bluetooth			
				A9 DALI 10-100% Dim			

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature.

Example Code: SSY12-WS-DI-30-O-4K-A1-W-E3





Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

CE BS EN60598-1:2015
ISO 9001 Certification

Datasheet Code: PA-SSY
MADE IN BRITAIN

P&A SubSpace Y

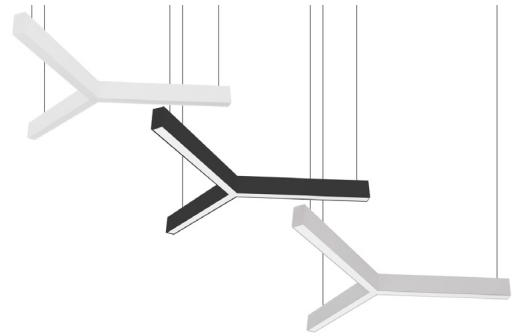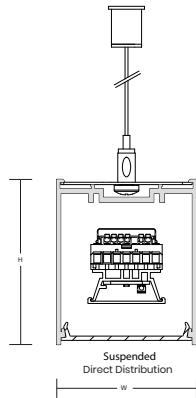

Dimensions

D Ø	W	H	Finish	Code	Colour Swatch
600	50	85	White	9016M	
900	50	85	Black	9005	
1200	50	85	Silver	9006	
Custom*	50	85	Custom*	Custom*	

All dimensions are measured in millimetres (mm)
*Custom lengths upon request.

*Custom Colours upon request.

Ancillaries

Wire Suspensions

Wire Suspensions	Code
3m Wire suspension kit	SS50-WS-3M
Custom length (1m increments)	SS50-WS-ZM

Clear 0.75mm², Supply Cable

3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-ZM
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-ZM
6 core, Clear, 3m	FL-6C-C-3M
6 core, Clear, Custom Length*	FL-6C-C-ZM

Black 0.75mm², Supply Cable

3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-ZM
5 core, Black, 3m	FL-5C-B-3M
5 core, Black, Custom Length*	FL-5C-B-ZM
6 core, Black, 3m	FL-6C-B-3M
6 core, Black, Custom Length*	FL-6C-B-ZM

White 0.75mm², Supply Cable

3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-ZM
5 core, White, 3m	FL-5C-W-3M
5 core, White, Custom Length*	FL-5C-W-ZM
6 core, White, 3m	FL-6C-W-3M
6 core, White, Custom Length*	FL-6C-W-ZM

*Please replace Z with required cut meter length.

**Please replace Z with required Custom RAL Colour.

Ancillaries images

3m Wire suspension kit




Distribution Types

Direct



Direct/Indirect



IP20

IP20
Protection of fingers against
access to hazardous parts, and
protection against objects larger
than 12.5mm



Safety Class
Class 1 Safety: chassis is
connected to earth with a
separate terminal, instead of via
the mains cable



5 Year
Guarantee
Warranty
5 year Guarantee



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

CE BS EN60598-1:2015
ISO 9001 Certification

MADE IN BRITAIN®

Datasheet Code: PA-SSY