

3K

4K

IP20



EM3




PAR-FP

Recessed

PAR-FP is an edge lit, Ultra slimline office luminaire, designed for exposed T ceiling grids. That can be direct recessed, surface or suspended. Available in module dimensions of 595 x 595mm and 620 x 620mm.

- Efficacy of up to 120 lm/W.
- LG7 Complaint, UGR<19 microprism diffuser.
- Colour temperatures: 3000°k, 4000°k.
- Colour Finishes: White RAL9016 as standard.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim.
- Wireless control options: Casambi or Bluetooth. In remote housing
- Supplied with remote driver.
- Supplied as recessed as standard, Surface or Wire suspended version available on request.
- Standalone Emergency options available.



PAR-FP-M

Technical

Product	PAR-FP
Mounting type	Recessed
Lumens	2860 - 3870 Lm
Efficacy	Upto 120 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Microprism (UGR<19)
Control	DALI 1-100%, DSI, Casambi, Bluetooth, Fixed Output
Emergency	Standalone available upon request
Rendering	Ra80
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 4
L70/B10	>50K

P&A PAR-FP


Luminaire Order Builder

PAR-FP

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.
Select Current	CCT	Control	Finish	Emergency
70 700mA 2860 Lm - 23.8W 80 800mA 3870 Lm - 32.4W	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A5 Casambi A6 Bluetooth	W RAL9016	EM Remote standalone emergency available upon request

All electrical and optical data subject to $\pm 10\%$ tolerances. Values based on 4000K Colour temperature

Example Code: PAR-FP-80-4K-A1-W-

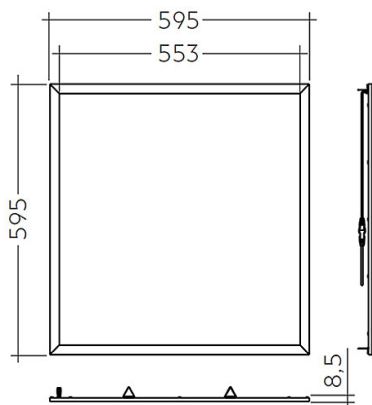

Dimensions

L	W	H	Finish	Code	Colour Swatch
			RAL		
595	595	8.5	White	9016M	
620	620	8.5			

All dimensions are measured in millimetres (mm)

