


3K

4K

IP20




EM3

Ultralux

Recessed

Ultralux is a contemporary office luminaire, designed for exposed T ceiling grids. Manufactured from powder coated sheet steel, with central microprism or opal optics, with curved indirect wings.

- Efficacy of up to 111 lm/W
- UGR<19 diffuser*.
- Colour temperatures: 3000°k, 4000°k.
- Suitable for 15mm T ceiling as standard, other types available on request.
- Colour Finishes: White (9016) as standard (Other colours available on request).
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test or Dali addressable.



Technical

Product	Ultralux
Mounting type	Recessed
Lumens	2110 - 5822 lm
Efficacy	Up to 111 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed Output
Emergency	3 hour, DALI, Self-Test
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>75K

* UGR 19 diffuser available on special request.

P&A Ultralux


Luminaire Order Builder

Ultralux

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.	STEP 6.
Select Current	Optic	CCT	Control	Finish	Emergency
50 500mA 3944 Lm - 32.3W	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016	E3 Standard 3 Hour
55 550mA 4339 Lm - 33.5W					
60 600mA 4733 Lm - 38.7W					
65 650mA 5128 Lm - 42W					
70 700mA 5522 Lm - 45.2W					
		4K 4000K	A1 DALI 1-100% Dim	Z Custom	ED DALI/EMPRO
			A2 DSI		ES Self-Test
			A3 Switch Dim		
			A4 1-10v		
			A5 Casambi		
			A6 Bluetooth		

All electrical and optical data subject to $\pm 10\%$ tolerances.
 Values based on 4000K Colour temperature and Opal diffuser.

Example Code: ULTRALUX-50-O-3K-A1-W-E3

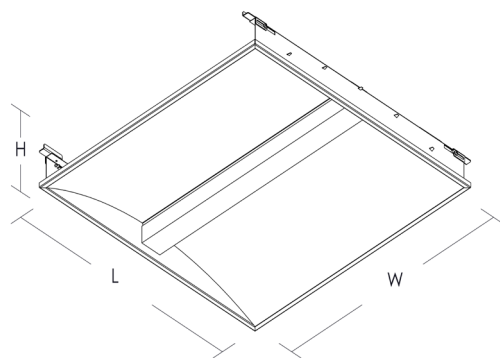

Dimensions

L	W	H	Finish	Code	Colour Swatch
595	595	65	White	9016M	
			Custom*	Custom	

All dimensions are measured in millimetres (mm)

*Custom Colours upon request.

IP20

IP20
 Protection of fingers against
 access to hazardous parts, and
 protection against objects larger
 than 12.5mm



Safety Class
 Class 1 Safety: chassis is
 connected to earth with a
 separate terminal, instead of via
 the mains cable



Warranty
 5 year Guarantee



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
 01704 891333
 sales@pandaprojects.co.uk
 www.pandaprojects.co.uk

Datasheet Code: PA-10405-0

CE BS EN60598-1:2015
 ISO 9001 Certification

