

NL

Recessed

NL is a decorative, recessed accent light. Its sleek compact minimalist appearance with flush profile, screwless faceplate makes it ideal for healthcare applications.

- Efficacy of up to 92 lm/W.
- Colour temperatures: 3000°k or 4000°K.
- Colour Finish: White (9016) as standard.
- Remote driver as standard.
- Dimming option: DALI 1-100%*.
- Emergency not available

Technical

Product	NL
Mounting type	Recessed
Lumens	113 - 226 Lm
Efficacy	Upto 92 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control (Remote)	DALI 1-100%, Fixed output
Emergency	Not available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>100K

*Drivers are fully remote and need to be located in the adjacent wall void.


Luminaire Order Builder

NL

STEP 1.	STEP 2.	STEP 4.	STEP 5.	STEP 6.	STEP 7.
Select Current	Optics	CCT	Control	Finish	Emergency
35 350mA 113 Lm - 1.2W 40 400mA 129 Lm - 1.4W 45 450mA 145 Lm - 1.6W 50 500mA 162 Lm - 1.8W 55 550mA 178 Lm - 1.9W 60 600mA 194 Lm - 2W 65 650mA 210 Lm - 2.3W 70 700mA 226 Lm - 2.4W	O Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim	W RAL9016M	EM Not Available

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature.

Example Code: NL-50-O-4K-A1-W

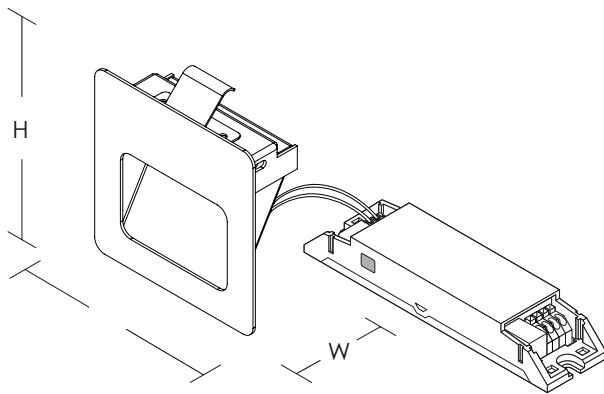

Dimensions

L	W	H	Finish	Code	Color
80*	30*	80*	White	9016	

All dimensions are measured in millimetres (mm)
*Not including driver

IP20

IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 1 Safety chassis is connected to earth with a separate terminal, instead of via the mains cable



5 Year
Guarantee
Warranty
5 year Guarantee