



5K

IP65



EM3

DECO

Wall Mounted

DECO is an decorative, attractive, robust IP65, Cast aluminium, bulkhead luminaire. Suitable for building perimeters, walkways, entrances & exits.

- Efficacy of up to 88 lm/w.
- Colour temperature: 5000°k as standard.
- Colour Finishes: Black (9005) as standard, Other RAL colours, available on request.
- Fixed output as standard.
- Integral Photocell as standard.
- Emergency options: Standard 3hr.

Technical

Product	DECO
Mounting type	Wall mounted
Lumen	1240 Lm
Efficacy	Up to 88 Lm
Colour Temperature	Day White (5K)
Control	Fixed output
Optics	Polycarbonate
Emergency	3 hour
Rendering	Ra80+
IP Rating	IP65
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>50K


Luminaire Order Builder

DECO

STEP 1. Select Wattage	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
14 14W 1240 Lm	P Polycarbonate Diffuser	5K 5000K	FO Fixed Output	B RAL9005 Z Custom	E3 Standard 3 Hour

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature.

Example Code: DECO14P5KFOBE3

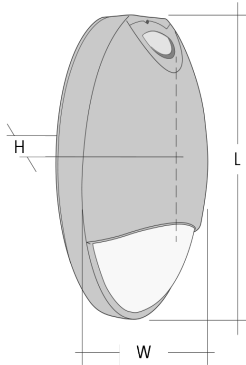

Dimensions

L	W	H	RAL	Code	Colour Swatch
265	100	95	Black	9005	
			Custom*	Custom*	

All dimensions are measured in millimetres (mm)

Finish

RAL	Code	Colour Swatch
Black	9005	
Custom*	Custom*	

*Custom Colours upon request



IP65
Protection against dust and solid objects; Water jets from any angle (12.5mm nozzle)



Safety Class
Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
5 year Guarantee