





Image shown with optional flex\*\*

# GLOBE

## Pendant

GLOBE is a decorative LED pendant luminaire. It can be used for general lighting or can be installed as a group to create feature.

- Efficacy of up to 155 lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request\*.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Supplied in PMMA as standard.
- Globe supplied with ceiling rose as standard (excluding flex\*\*).
- Supplied with adjustable support wires and individual mounting brackets as standard.
- Optional Flex available, in 3-5 core, Clear, Black or White as standard. Custom colours and lengths available upon request.
- Emergency not available.



### Technical

Product	GLOBE
Mounting type	Pendant
Diameters	300mm 400mm
Lumens	2487 - 3382lm
Efficacy	Up to 155 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal PMMA diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>50K

\* Monks cap and Ceiling rose only.

\*\*Excluding flex, see page 3 for flex options.

## Luminaire Order Builder

### GL3 (300mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
<b>40</b> 400mA 2487 Lm -16.5W  <b>45</b> 450mA 2798 Lm -18.6W  <b>50</b> 500mA 3109 Lm -20.6W  <b>55</b> 550mA 3419 Lm -22.7W	<b>O</b> Opal Diffuser PMMA	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100%  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>S</b> RAL9006  <b>Z</b> Custom	<b>-</b> Not Available

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
Values based on 4000K Colour temperature.


Example Code: GL34004KA1W

### GL4 (400mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
<b>50</b> 500mA 2405 Lm -15.6W  <b>55</b> 550mA 2645 Lm -17.2W  <b>60</b> 600mA 2886 Lm -18.8W  <b>65</b> 650mA 3126 Lm -20.3W  <b>70</b> 700mA 3382 Lm -21.9W	<b>O</b> Opal Diffuser PMMA	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100%  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>S</b> RAL9006  <b>Z</b> Custom	<b>-</b> Not Available

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
Values based on 4000K Colour temperature.

Example Code: GL46004KA1W

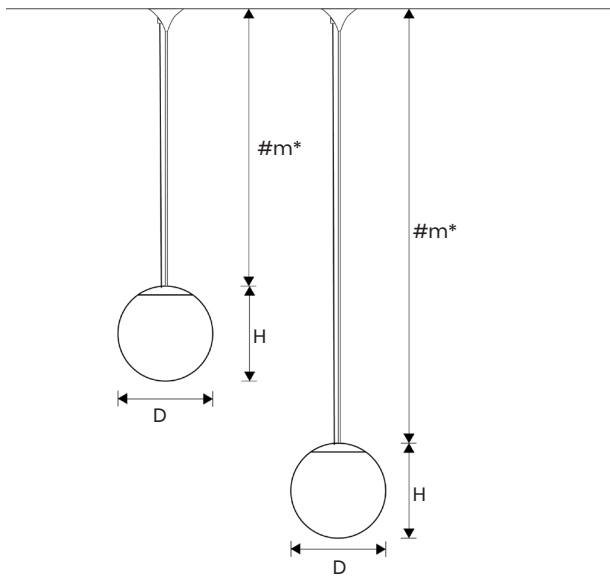

## Dimensions

D Ø	H Ø	RAL	Code	Colour Swatch
300	300	White	9016M	
400	400	Black	9005	
		Silver	9006	
		Custom*	Custom*	

## Finish

All dimensions are measured in millimetres (mm)  
\*Custom lengths available upon request

\*Custom Colours upon request  
Monks cap & Ceiling Rose only

## Ancillaries

Wire Suspensions	Code
3m Wire suspension kit	GL-WS-3M
Custom length (1m increments)	GL-WS-#M
<b>Clear 0.75mm<sup>2</sup>, Supply Cable</b>	
3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-#M
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-#M
<b>Black 0.75mm<sup>2</sup>, Supply Cable</b>	
3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-#M
5 core, Clear, 3m	FL-5C-B-3M
5 core, Clear, Custom Length*	FL-5C-B-#M
<b>White 0.75mm<sup>2</sup>, Supply Cable</b>	
3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-#M
5 core, Clear, 3m	FL-5C-W-3M
5 core, Clear, Custom Length*	FL-5C-W-#M

\*Please replace Z with required cut meter length.

## Ancillaries images

### Decorative Conical Ceiling Rose

