

45K

IP20



EM3



# MET

## Wall mounted

MET is a traditional emergency exit luminaire, consisting of a coated steel enclosure with printed opal polycarbonate legend, with a viewing distance of up to 36m.

- Colour temperatures: 4500°k.
- Colour Finishes: White as standard (other colours on special request).
- ISO and Euro legend panels available.
- Up to 36m viewing Distance.
- Emergency options: Standard 3hr, Self-Test or DALI addressable, 3hr DALI Wireless Sentinel.

### Technical

Product	MET
Mounting type	Wall Mounted
Standard Sizes	385mm
Colour Temperature	Neutral White (45k)
Legend	Up Arrow
	Down Arrow
	Right Arrow
	Left Arrow
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
Led Lifetime	>50K


## Luminaire Order Builder

### MET

STEP 1. Select Operation	STEP 3. Legend sign	STEP 4. CCT	STEP 6. Finish	STEP 7. Emergency
<p><b>M3</b> Maintained 3W</p> <p><b>NM</b> Non maintained 2.4W</p>	<p><b>AL</b> Exit sign left ISO Format</p> <p><b>AR</b> Exit sign right ISO Format</p> <p><b>AU</b> Exit sign up ISO Format</p> <p><b>AD</b> Exit sign down ISO Format</p> <p><b>LA</b> Exit sign left EC Format</p> <p><b>RA</b> Exit sign right EC Format</p> <p><b>UA</b> Exit sign up EC Format</p> <p><b>DA</b> Exit sign down EC Format</p>	<p><b>45K</b> 4500K</p>	<p><b>W</b> White</p>	<p><b>E3</b> Standard 3 Hour</p> <p><b>ED</b> DALI/EMPRO</p> <p><b>ES</b> Self-Test</p> <p><b>EW</b> 3 hour DALI Wireless Sentinel</p>

All electrical and optical data subject to  $\pm 10\%$  tolerances.

Example Code: METM3AL45KW E3

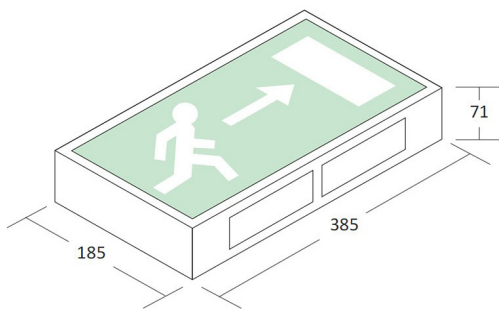






#### Dimensions

L	W	H	Finish	Code	Colour Swatch
385	185	71	White	White	

All dimensions are measured in millimetres (mm)

## Exit Legends

ISO7010 Legends	Legend	Code	European (EC)	Legend	Code
	ISO Left Arrow	AL		EC Left Arrow	LA
	ISO Right Arrow	AR		EC Right Arrow	RA
	ISO Up Arrow	AU		EC Arrow Up	UA
	ISO Down Arrow	AD		EC Arrow Down	DA

**IP20**  
 Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



**Safety Class**  
 Class 1 Safety chassis is connected to earth with a separate terminal, instead of via the mains cable



**Warranty**  
 5 year Guarantee