



45K

IP40



MEX

Surface/Recessed

MEX is an emergency exit luminaire, suitable for recessed, surface or suspended mounting, available in two sizes with viewing distances from 25m to 30m. Legend panel can be suspended by adjusting integral suspension wires from 15mm to 1m as standard.

- Colour temperature: 4500°k.
- Colour Finishes: White only.
- ISO and EC legend panels available.
- Up to 25m and 30m* viewing Distances.
- Emergency options: Standard 3hr, Self-Test, DALI addressable or 3hr DALI Wireless Sentinel**.

Technical

Product	MEX
Mounting type	Surface Recessed
Standard Sizes	265mm (Small Surface) 330mm (Large Surface) ** 325mm (Small Recessed) 388mm (Large Recessed)**
Colour Temperature	Neutral White (45k)
Legend	Up Arrow Down Arrow Right Arrow Left Arrow
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP40
Safety Class	Class 1
Led Lifetime	50K

* 30m Viewing distance only available within the 330mm housing.
** Wireless only available with 330mm housing.

Luminaire Order Builder

MEX-S (265mm Small body)

STEP 1. Select Mounting	STEP 2. Operation	STEP 3. CCT	STEP 4. Finish	STEP 5. Legend	STEP 6. Emergency
SF Surface R Recessed	M3 Maintained 2.6W NM Non maintained 0.8W	45K 4500K	W White	AL Exit sign left ISO Format AR Exit sign right ISO Format AU Exit sign up ISO Format AD Exit sign down ISO Format LA Exit sign left EC Format RA Exit sign right EC Format UA Exit sign up EC Format DA Exit sign down EC Format	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test

All electrical and optical data subject to $\pm 10\%$ tolerances.


Example Code: MEXSRM345KWALE3

MEX-L (330mm Large Body)

STEP 1. Select Mounting	STEP 2. Operation	STEP 3. CCT	STEP 4. Finish	STEP 5. Legend	STEP 6. Emergency
SF Surface R Recessed	M3 Maintained 2.6W NM Non maintained 0.8W	45K 4500K	W White	AL Exit sign left ISO Format AR Exit sign right ISO Format AU Exit sign up ISO Format AD Exit sign down ISO Format LA Exit sign left EC Format RA Exit sign right EC Format UA Exit sign up EC Format DA Exit sign down EC Format	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances.

Example Code: MEXLRM345KWALE3

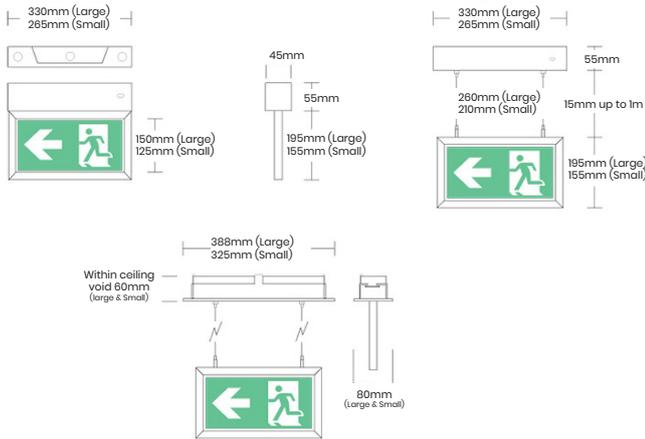

Dimensions

L	W	H	Finish	Code	Colour Swatch
265 (Surface)	45	225	White	White	
330 (Surface)	45	225			
325 (Recessed)	80	215			
388 (Recessed)	80	255			

All dimensions are measured in millimetres (mm)
Recessed versions, 60mm ceiling void depth/height.

Exit Legends

ISO7010 Legends	Legend	Code	European (EC)	Legend	Code
	ISO Left Arrow	AL		EC Left Arrow	LA
	ISO Right Arrow	AR		EC Right Arrow	RA
	ISO Up Arrow	AU		EC Arrow Up	UA
	ISO Down Arrow	AD		EC Arrow Down	DA



IP40
Protection against solid objects that over 1mm.



Safety Class
Class 1 Safety chassis is connected to earth with a separate terminal, instead of via the mains cable.



Warranty
5 year Guarantee