

45K

IP42



EM3



MEZ

Wall Mounted

MEZ is an emergency luminaire, with sloped opal polycarbonate diffuser complete with screen printed legend. It provides an excellent viewing distance of 30 metres.

- Colour temperature: 4500°k.
- Colour Finish: White polycarbonate housing.
- Screen printed in both: ISO and EC format.
- Nickel Cadmium (NiCd) battery.
- 30m viewing distance.
- Emergency options: Standard 3hr, Self-Test, DALI addressable or 3Hr DALI Wireless Sentinel.

Technical

Product	MEZ
Mounting type	Wall Mounted
Length	333mm
Lumens	N/A
Colour Temperature	Neutral White (45k)
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP42
Safety Class	Class 2
LED Lifetime	50K


Luminaire Order Builder

MEZ

STEP 1. Select Operation	STEP 2. Legend sign	STEP 3. CCT	STEP 4. Finish	STEP 5. Emergency
M3 Maintained 4.2W NM Non maintained	AL Exit sign left ISO Format AR Exit sign right ISO Format AU Exit sign up ISO Format AD Exit sign down ISO Format LA Exit sign left EC Format RA Exit sign right EC Format UA Exit sign up EC Format DA Exit sign down EC Format	45K 4500K	W White	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4500K Colour temperature.

Example Code: MEZM3AL45WEW

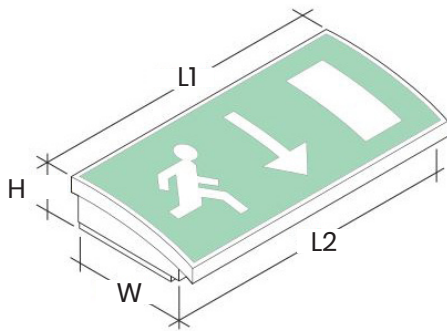

Dimensions

L1	L2	W	H	RAL	Code	Colour Swatch
333		134	75	White	W	<input type="text"/>

Finish

All dimensions are measured in millimetres (mm)

Self adhesive Exit Legends

ISO7010 Legends	Legend	Code	European (EC)	Legend	Code
	ISO Left Arrow	AL		EC Left Arrow	LA
	ISO Right Arrow	AR		EC Right Arrow	RA
	ISO Up Arrow	AU		EC Arrow Up	UA
	ISO Down Arrow	AD		EC Arrow Down	DA

IP42 IP42
Protection against 1mm
wires, screws and vertically
dripping water.

 **Safety Class**
Class 2 Safety chassis is double
insulated appliance, designed
in such a way that it does not
require a safety connection to
electrical earth.

 **5 Year
Guarantee** **Warranty**
5 year Guarantee