



5K

IP20



EM3



MTS

Surface

MTS is a Mini twin spot emergency luminaire, with polycarbonate body and lens system, with adjustable beam control.

- Colour temperature: 5000°k.
- Colour Finish: White as standard.
- Nickel Metal Hydride (NiMH) batteries.
- Adjustable Heads: For greater control and coverage
- Supplied as maintained as standard
- Emergency options: Standard 3hr, Self-Test or DALI addressable, 3hr DALI Wireless Sentinel.

Technical

Product	MTS
Mounting type	Surface
Length	186mm
Lumens	2 x 110Lm
Colour Temperature	Day White (5K)
Optics	Narrow beam
	Wide Beam
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 2
Led Lifetime	50K


Luminaire Order Builder

MTS

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.
Operation	Optics	CCT	Finish	Emergency
M3 Maintained 2 x 2W - 2 x 110lm	NB Narrow Beam WB Wide Beam	5K 5000K	W White	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances.

Example Code: MTSM3NB5KFOWE3

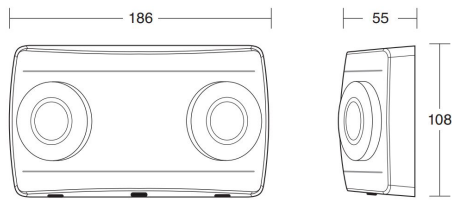

Dimensions

L	W	H	RAL	Code	Colour Switch
186	108	55	White	W	<input type="text"/>

All dimensions are measured in millimetres (mm)

Additional Images

Narrow beam Optics	Wide Beam Optics
--------------------	------------------



IP20

IP20
Protection of fingers against hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 2 Safety chassis is double insulated appliance, designed in such a way that it does not require a safety connection to electrical earth



Warranty
5 year Guarantee