

# NL

## Recessed

NL is a decorative, recessed accent light. Its sleek compact minimalist appearance with flush profile, screwless faceplate makes it ideal for healthcare applications.

- Efficacy of up to 92 lm/W.
- Colour temperatures: 3000°k or 4000°K.
- Colour Finish: White (9016) as standard.
- Remote driver as standard.
- Dimming option: DALI 1-100%\*.
- Emergency not available

### Technical

Product	NL
Mounting type	Recessed
Lumens	113 - 226 Lm
Efficacy	Upto 92 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control (Remote)	DALI 1-100%, Fixed output
Emergency	Not available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>100K

\*Drivers are fully remote and need to be located in the adjacent wall void.


## Luminaire Order Builder

NL

STEP 1.	STEP 2.	STEP 4.	STEP 5.	STEP 6.	STEP 7.
Select Current	Optics	CCT	Control	Finish	Emergency
<b>35</b> 350mA 113 Lm - 1.2W  <b>40</b> 400mA 129 Lm - 1.4W  <b>45</b> 450mA 145 Lm - 1.6W  <b>50</b> 500mA 162 Lm - 1.8W  <b>55</b> 550mA 178 Lm - 1.9W  <b>60</b> 600mA 194 Lm - 2W  <b>65</b> 650mA 210 Lm - 2.3W  <b>70</b> 700mA 226 Lm - 2.4W	<b>O</b> Opal Diffuser	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim	<b>W</b> RAL9016M	<b>EM</b> Not Available

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
Values based on 4000K Colour temperature.

Example Code: NL5004KA1W

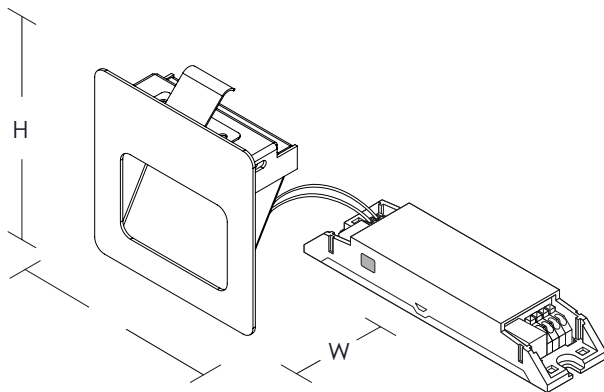

### Dimensions

L	W	H	Finish	Code	Color
80*	30*	80*	White	9016	

All dimensions are measured in millimetres (mm)  
\*Not including driver

**IP20**

IP20  
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class  
Class 1 Safety chassis is connected to earth with a separate terminal, instead of via the mains cable



5 Year  
Guarantee  
Warranty  
5 year Guarantee