

45K

IP20



EM3

# SLD

## Surface & Recessed

SLD is a decorative emergency exit luminaire, suitable for recessed surface or suspended mounting, with viewing distances of up to 28 metres. Surface mounted option can be suspended by using additional wire suspension kit, adjustable up to 1m.

- Colour temperature: 4500°k.
- Colour Finishes: Silver as standard. White available upon request.
- ISO and EC legend panels available.
- Up to 28m viewing Distances.
- Nickel Cadmium (NiCd) Battery.
- Emergency options: Standard 3hr, Self-Test or DALI addressable, 3hr DALI Wireless Sentinel\*.

### Technical

Product	SLD
Mounting type	Surface Recessed
Standard Sizes	300mm (Surface) 355mm (Recessed)
Colour Temperature	Neutral White (45k)
Legend	Up Arrow Down Arrow Right Arrow Left Arrow
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP40
Safety Class	Class 1
L70/B10	50K

\* Available in the recessed version only.


## Luminaire Order Builder

### SLD

STEP 1. Select mounting	STEP 2. Operation	STEP 3. Legend sign	STEP 4. CCT	STEP 5. Finish	STEP 6. Emergency
<b>SF</b> Surface  <b>WS</b> Wire suspended  <b>R</b> Recessed	<b>M3</b> Maintained 4.5W  <b>NM</b> Non maintained	<b>AL</b> Exit sign left ISO Format  <b>AR</b> Exit sign right ISO Format  <b>AU</b> Exit sign up ISO Format  <b>AD</b> Exit sign down ISO Format  <b>LA</b> Exit sign left EC Format  <b>RA</b> Exit sign right EC Format  <b>UA</b> Exit sign up EC Format  <b>DA</b> Exit sign down EC Format	<b>45K</b> 4500K	<b>S</b> Silver  <b>Z</b> Custom	<b>E3</b> Standard 3 Hour  <b>ED</b> DALI/EMPRO  <b>ES</b> Self-Test  <b>EW*</b> 3 hour DALI Wireless Sentinel

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
 Values based on 4500K Colour temperature.  
 \* Only Available in recessed version only.

Example Code: SLDSFM3LA45KSE3

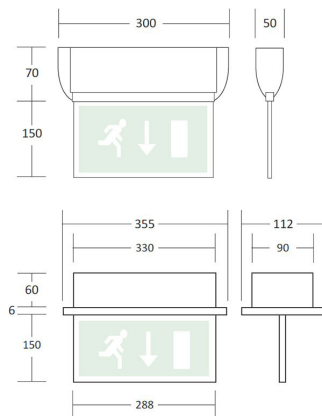









### Dimensions

L	W	H	RAL	Code	Colour Switch
300	50	220	Silver	S	
355*	90	216	Custom	Z	

All dimensions are measured in millimetres (mm)  
 \* Recessed version only

### Finish

## Exit Legends

ISO7010 Legends	Legend	Code	European (EC)	Legend	Code
	ISO Left Arrow	AL		EC Left Arrow	LA
	ISO Right Arrow	AR		EC Right Arrow	RA
	ISO Up Arrow	AU		EC Arrow Up	UA
	ISO Down Arrow	AD		EC Arrow Down	DA

**IP20**  
 IP20  
 Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



**Safety Class**  
 Class 1 Safety chassis is connected to earth with a separate terminal, instead of via the mains cable



**Warranty**  
 5 year Guarantee