

DRM

Surface/Suspended

DRM is an architectural feature luminaire, supplied as either surface or wire suspended. Manufactured from spun aluminium, it is available in 500mm, 600mm, 700mm and 900mm diameters. Supplied as standard with direct/indirect distribution, in a range of outputs to suit your needs

- Efficacy of up to 140 lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Suspended Luminaire supplied complete with individual wire suspensions, which are adjustable up to 3m length as standard*.
- Custom length wire suspension, Clear, Black or White flex are also available.
- 300mm Version Available upon request.
- Emergency options: Standard 3hr, Self-Test or Dali addressable, 3hr Dali Wireless Sentinel.

Technical

Product	DRM
Mounting type	Surface Suspended
Diameters	500-900mm
Lumens	3203 - 11706lm
Efficacy	Upto 140 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi
Emergency	3 hour, DALI, Self-Test, DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 2
L70/B10	>50K

* Central single point fixing via ceiling rose available as additional item – see ancillaries.

Surface mounted version shown above

Luminaire Order Builder

DRM5 (500mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
SF Surface	45 450mA 3203 Lm - 35.8W	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	57 575mA 3391 Lm - 38.7W		4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
				A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	EW 3 hour DALI Wireless Sentinel
				A4 1-10v		
				A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature, Opal Diffuser and white housing

Example Code: DRM5WS3504KA1WE3

DRM6 (600mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
SF Surface	57 575mA 4021 Lm - 47.4W	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	70 700mA 4638 Lm - 58.7W		4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
				A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	EW 3 hour DALI Wireless Sentinel
				A4 1-10v		
				A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature, Opal Diffuser and white housing

Example Code: DRM6WS5704KA1WE3

Luminaire Order Builder

DRM7 (700mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
SF Surface	57 575mA 3820 Lm - 47.4W	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	70 700mA 4406 Lm - 58.7W		4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
				A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	EW 3 hour DALI Wireless Sentinel
				A4 1-10v		
				A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature, Opal Diffuser and white housing.


Example Code: DRM7WS57O4KA1WE3

DRM9 (900mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
SF Surface	45 450mA 8233 Lm - 59.3W	O Opal Diffuser	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
WS Wire Suspended	70 700mA 12449 Lm - 91.7W		4K 4000K	A1 DALI 1-100%	B RAL9005	ED DALI/EMPRO
				A2 DSI	S RAL9006	ES Self-Test
				A3 Switch Dim	Z Custom	EW 3 hour DALI Wireless Sentinel
				A4 1-10v		
				A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature, Opal Diffuser and white housing.

Example Code: DRM9WS70O4KA1WE3

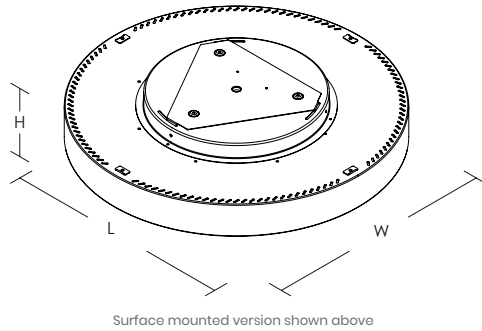

Dimensions

L	W	H*
500	500	116
600	600	118
700	700	116
900	900	116

Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Silver	9006	
Custom*	Custom*	

All dimensions are measured in millimetres (mm)
*Including rear gear housing.

*Custom Colours upon request

Ancillaries

Wire Suspensions	Code
3m Wire suspension kit	DRM-WS-3M
Custom length (1m increments)	DRM-WS-ZM

Clear 0.75mm², Supply Cable

3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-ZM
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-ZM
6 core, Clear, 3m	FL-6C-C-3M
6 core, Clear, Custom Length*	FL-6C-C-ZM

Black 0.75mm², Supply Cable

3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-ZM
5 core, Black, 3m	FL-5C-B-3M
5 core, Black, Custom Length*	FL-5C-B-ZM
6 core, Black, 3m	FL-6C-B-3M
6 core, Black, Custom Length*	FL-6C-B-ZM

White 0.75mm², Supply Cable

3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-ZM
5 core, White, 3m	FL-5C-W-3M
5 core, White, Custom Length*	FL-5C-W-ZM
6 core, White, 3m	FL-6C-W-3M
6 core, White, Custom Length*	FL-6C-W-ZM

Decorative Ceiling Rose, with 6 Way Wago terminal (c/w central hole for single wire suspension fixing).

Silver RAL9006	CR-120-I-S
Black RAL9005	CR-120-I-B
White RAL9016	CR-120-I-W
Custom RAL Colour**	CR-120-I-Z

*Please replace Z with required cut meter length.

**Please replace Z with required Custom RAL Colour.

Ancillaries images

3m Wire suspension kit	Decorative Ceiling Rose, with 6 Way Wago terminal.
------------------------	--



Distribution Type

Direct/Indirect

