

Moon

Surface/ Wall Mounted

Moon is a decorative circular bulkhead luminaire with polycarbonate diffuser, manufactured from spun aluminium, in a 425mm diameter. Available in a range of outputs to suit your needs.

- Efficacy of up to 109 lm/w.
- Colour temperatures: 3000°k and 4000°k as standard.
- Optics: Opal TP(a) Polycarbonate diffuser as standard.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Special Colour Finishes: Anodised Chrome or Anodised Brass available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3Hr Dali Wireless Sentinel.

Technical

Product	Moon
Mounting type	Surface/Wall Mounted
Diameters	425mm
Lumens	2241 - 3362 lm
Efficacy	Upto 109 lm/w
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser TP(a)
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K


Luminaire Order Builder

Moon

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.	STEP 6.
Select Current	Optic	CCT	Control	Finish	Emergency
60 600mA 2241lm- 20.5W	O Opal Diffuser TP(a)	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
90 900mA 3362lm- 30.7W		4K 4000K	A1 DALI 1-100% Dim	B RAL9005	
			A2 DSI	S RAL 9006	ES Self-Test
			A3 Switch Dim	AC Anodised Chrome	EW 3 hour DALI Wireless Sentinel
			A4 1-10v	AB Anodised Brass	
			A5 Casambi	Z Custom	

All electrical and optical data subject to ± 10% tolerances. Values based on 4000K Colour temperature.

Example Code: Moon-60-O-4K-A1-W

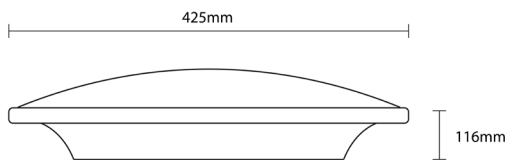

Dimensions

DØ	H
425	116

All dimensions are measured in millimetres (mm)

Finish

RAL	Code	Colour Swatch
White	9016M	
Silver	9006	
Anodised Chrome	AC	
Anodised Brass	AB	
Custom*	Custom*	

*Custom Colours upon request



IP20
 Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
 Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
 5 year Guarantee