

3K

4K

IP20



EM3

CRV

Wall mounted

CRV is a sleek linear wall mounted architectural luminaire, Its stylish minimalist form with curved edges, provides the perfect balance of form and function for transitional spaces, Supplied as standard with direct/indirect distribution, with a variety of outputs to suit your needs.

- Efficacy of up to 123 lm/W.
- Colour temperatures: 3000°K, 4000°K.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3Hr Dali Wireless Sentinel*.

Technical

Product	CRV
Mounting type	Wall mounted
Lengths	362mm
	642mm
	922mm
Lumens	1585 - 6790Lm
Efficacy	Up to 123 lm/W
Colour Temperature	Warm White (3K)
	Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

* Only available in CRV6 & CRV9

Luminaire Order Builder

CRV3 (362 x 46mm)

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
35 350mA 1584 Lm -12.8W 40 400mA 1811 Lm -14.7W	O Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016M B RAL9005 S RAL9006 Z Custom	- Not Available

All electrical and optical data subject to $\pm 10\%$ tolerances.
 Values based on 4000K Colour temperature.

Example Code: CRV335O4KA1W

CRV6 (642 x 46mm)

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
35 350mA 3168 Lm -25.5W 40 400mA 3620 Lm -29W	O Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016M B RAL9005 S RAL9006 Z Custom	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances.
 Values based on 4000K Colour temperature.

Example Code: CRV635O4KA1WE3



Luminaire Order Builder

CRV9 (922 x 46mm version)

STEP 1.	STEP 2.	STEP 4.	STEP 5.	STEP 6.	STEP 7.
Select Current	Optics	CCT	Control	Finish	Emergency
35 350mA 4753 Lm - 38.4W 40 400mA 5432 Lm - 43.9W 45 450mA 6111 Lm - 49.4W 50 500mA 6790 Lm - 54.9W	O Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016M B RAL9005 S RAL9006 Z Custom	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances. Values based on 4000K Colour temperature.

Example Code: CRV9-35-O-4K-A1-W-E3

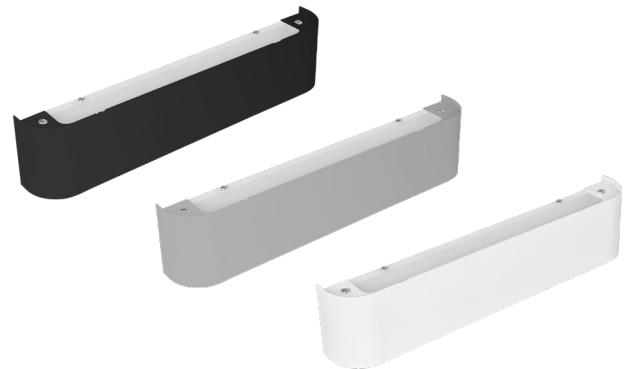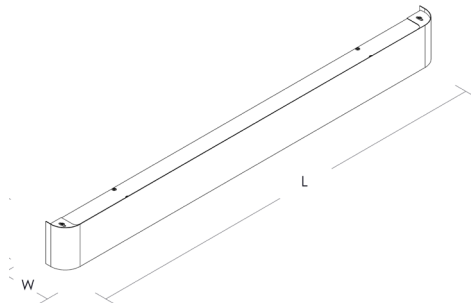

Dimensions

L	W	H	Finish	RAL	Code	Colour Swatch
362	45	90	White		9016	
642	46	90	Black		9005	
922	46	90	Silver		9006	
			Custom*		Custom*	

All dimensions are measured in millimetres (mm)

*Custom Colours upon request



IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
5 year Guarantee