


# SLR

## Wall Mounted

SLR is a IP65, IK10 circular bulkhead luminaire with a TP(a) polycarbonate diffuser with subtle halo effect. Ideal for interior and exterior applications.

- Efficacy of up to 135 lm/W.
- Colour temperatures: 3000°k and 4000°k as standard.
- Optics: Opal TP(a) Polycarbonate diffuser as standard.
- Colour Finish: White as standard.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Available with subtle halo effect as standard.
- BESA mounting holes form part of the standard housing.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3hr Dali Wireless Sentinel.



SLR-Opal

### Technical

Product	SLR
Mounting type	Wall Mounted
Lumens	1486 - 2472 Lm
Efficacy	Up to 135 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, Casambi, Bluetooth, Fixed output,
Emergency	3 hour, DALI, Self-Test, DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP65
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K


## Luminaire Order Builder

### SLR

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.	STEP 6.
Select Current	Optic	CCT	Control	Finish	Emergency
<b>35</b> 350mA 1486Lm- 11.2W  <b>40</b> 400mA 1701Lm- 12.7W  <b>45</b> 450mA 1896Lm- 14.2W  <b>50</b> 500mA 2064Lm- 15.5W  <b>55</b> 550mA 2259Lm- 17W  <b>60</b> 600mA 2472Lm- 18.7W	<b>O</b> Opal Diffuser TP(α)	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A5</b> Casambi	<b>W</b> White	<b>E3</b> Standard 3 Hour  <b>ED</b> DALI/EMPRO  <b>ES</b> Self-Test  <b>EW</b> 3 hour DALI Wireless Sentinel

All electrical and optical data subject to ±10% tolerances.  
 Values based on 4000K Colour temperature.

Example Code: SLR60O4KAIWE3

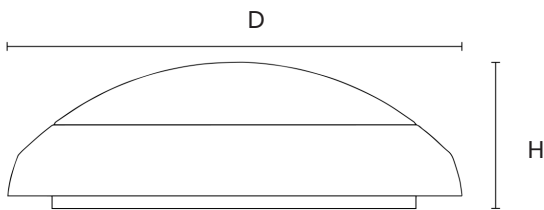

### Dimensions

DØ	H	Finish	Code	Colour Swatch
380	122.5	White	W	

All dimensions are measured in millimetres (mm)



**IP65**  
 Protection against dust and solid objects. Water jets from any angle (12.5mm nozzle)



**Safety Class**  
 Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



**Warranty**  
 5 Year Guarantee