



3K 4K 2.7-5.7K

IP20



SubSpace 70R

Recessed

Subspace 70R is a recessed linear architectural luminaire, manufactured from extruded aluminium, with a profile dimension of 85mm x 80mm. Supplied as Direct, in standard or custom lengths, with a variety of optics to suit your needs.

- Efficacy of up to 115 lm/W.
- LG7 Complaint, UGR<19 (when used with microprism diffuser).
- Colour temperatures: 3000°k, 4000°k or Tunable White (2700°k - 5700°k).
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v, DALI 10-100% Dim.
- Wireless control options: Casambi.
- Industry driver options: Fixed output or Dali dimming, for extended service life.
- Mounting options: Recessed with Trim or Recessed with Trimless bracket.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3Hr Dali Wireless Sentinel.
- Square, or rectangular features are also available upon request*.
- Special projects, which may combine both wall & ceiling, using recessed, surface and suspended versions in a single line of light, are also available upon request*.
- Integrated PIR available upon request*.

Technical

Product	SubSpace 70R
Mounting type	Recessed
Standard Lengths	870-2960mm
Custom Lengths	140mm increments
Lumen/M	1100-5500 Lm/M
Efficacy	Up to 115 Lm/W
Colour Temperature	Warm White (3K) Neutral White (4K) Tunable White (2.7K >5.7K)
Optics	Opal diffuser Microprism (UGR<19)
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed Output, Industry DALI, Industry Fixed Output, DALI 10-100%
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>75K

* Please contact P&A Technical Department for assistance

P&A SubSpace 70R


Luminaire Order Builder

SS70R

STEP 1. Select Frame	STEP 2. Current	STEP 3. Optics	STEP 4. Length	STEP 5. CCT	STEP 6. Control	STEP 7. Finish	STEP 8. Emergency
R Recessed with Trim	15 150mA 1100 Lm/M - 10W/m	O Opal Diffuser	870 870mm	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
TL Recessed with Trimless	20 200mA 1500 Lm/M - 14W/m	M Microprism UGR<19	1150 1150mm	4K 4000K	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
	25 250mA 1900 Lm/M - 17W/m		1430 1430mm	TW 2700K - 5700K Tunable white	A2 DSI	S RAL9006	ES Self-Test
	30 300mA 2200 Lm/M - 20W/m		1710 1710mm		A3 Switch Dim	Z Custom	EW 3 hour DALI Wireless Sentinel
	35 350mA 2600 Lm/M - 24W/m		1990 1990mm		A4 1-10v		
	40 400mA 3000 Lm/M - 27W/m		2270 2270mm		A5 Casambi		
			2550 2550mm		A6 Industry Fixed Output		
			2970 2970mm		A7 Industry DALI		
			XXXX Insert custom length (mm)		A8 DALI 10-100% Dim		

All electrical and optical data subject to ±10% tolerances.
Values based on 4000K Colour temperature.

Example Code: SS70R15O11504KAIWE3

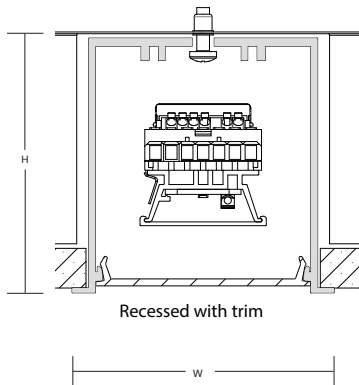

Dimensions

L	W	H
870	85	80
1150	85	80
1430	85	80
1710	85	80
1990	85	80
2270	85	80
2550	85	80
2970	85	80
Custom*	85	80

All dimensions are measured in millimetres (mm).
*Custom lengths upon request.
Dimension above based on Recessed with Trim. For Trimless frame dimensions please see installation instructions.
Please see installation instructions for all cut out sizes.

Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Silver	9006	
Custom*	Custom*	

*Custom Colours upon request.



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

Datasheet Code: PA-10453-0

