


# P&A



## TL-W

### Wall Mounted

TL-W is a sleek cylindrical wall mounted downlight. Constructed with extruded aluminium housing with cast aluminium heat sink and aluminium reflector. Available as Direct or Direct/Indirect, in range of outputs finishes to suit.

- Efficacy of up to 113 lm/W.
- Colour temperatures: 3000°k, 4000°k.
- Colour Finishes: White (9016), Black (9005), Other RAL colours, available on request.
- Available in 20°, 30° or 50° beam angles to suit your application.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim.
- Wireless control options: Casambi.
- Snoot options: Black snoot as standard, White available on request.

### Technical

Product	TL-W125
Mounting type	Wall Mounted
Diameter	125mm
Lumens	720 - 2323lm
Efficacy	Up to 113 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Beam Angles	20° 30° 50°
Dimming	DALI 1-100%, DSI, Switch Dim, Casambi
Emergency**	Not Available
Rendering	Ra90
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT  
01704 891333  
sales@pandaprojects.co.uk  
www.pandaprojects.co.uk

Datasheet Code: PA-10644-0

UK CA CE BS EN60598-1:2015  
ISO 9001 Certification

MADE IN BRITAIN

## Luminaire Order Builder

### TL-W125 (Direct)

STEP 1. Select Current	STEP 2. Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>40</b> 400mA 1858 Lm Down 16.6W  <b>45</b> 450mA 2090 Lm Down 18.7W  <b>50</b> 500mA 2323 Lm Down 20.7W	<b>D</b> Direct	<b>20</b> 20° degree beam  <b>30</b> 30° degree beam  <b>50</b> 50° degree beam	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>Z</b> Custom	- Not Available

All electrical and optical data subject to ±10% tolerances.  
Values based on 4000K Colour temperature and CRI90.  
CRI80 available upon request.

Example Code: TLW12540D304KAIW


### TL-W125 (Direct/Indirect)

STEP 1. Select Current	STEP 2. Direction	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>15</b> 150mA 720 Lm Up/ 720 Lm Down 13W  <b>20</b> 200mA 960Lm Up/ 960 Lm Down 17W	<b>DI</b> Direct/Indirect	<b>20</b> 20° degree beam  <b>30</b> 30° degree beam  <b>50</b> 50° degree beam	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>Z</b> Custom	- Not Available

All electrical and optical data subject to ±10% tolerances.  
Values based on 4000K Colour temperature and CRI90.  
CRI80 available upon request.

Example Code: TLW12520DI304KAIW

# P&A TL-W

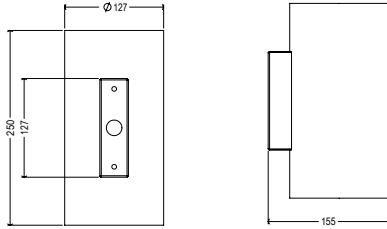

## Dimensions

D Ø	W	H
127	155	250

All dimensions are measured in millimetres (mm)

## Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Custom*	Custom*	

\*Custom Colours upon request

RAL9005 Black Snoot

RAL9016 White Snoot



IP20

IP20  
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class  
Class I Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty  
5 year Guarantee



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT  
01704 891333  
sales@pandaprojects.co.uk  
www.pandaprojects.co.uk

Datasheet Code: PA-10644-0

UK CA CE BS EN60598-1:2015 ISO 9001 Certification

