

3K

4K

IP20



EM3

# Verso

## Surface

Verso is a sleek modern batten luminaire, with drop dish diffuser, suitable for a wide range of applications, including offices, hospitals and schools. Supplied in a variety of outputs to suit your needs.

- Efficacy of up to 154 lm/W.
- Colour temperatures: 3000°k, 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3Hr Dali Wireless Sentinel.

## Technical

Product	Verso
Mounting type	Surface
Standard Lengths	1200mm
	1500mm
	1800mm
Lumen	2779-10774 Lm
Efficacy	Upto 154 lm/W
Colour Temperature	Warm White (3K)
	Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	3 hour, DALI, Self-Test, DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

## Luminaire Order Builder

### VERSO12 (1200mm)

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>25</b> 250mA 2799 Lm - 18.1W  <b>55H</b> 550mA 6157 Lm - 39.9W	<b>O</b> Opal Diffuser	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>S</b> RAL9006  <b>Z</b> Custom	<b>E3</b> Standard 3 Hour  <b>ED</b> DALI/EMPRO  <b>ES</b> Self-Test  <b>EW</b> 3 hour DALI Wireless Sentinel

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
Values based on 4000K Colour temperature.

Example Code: VERSO122504KAIWE3

### VERSO15 (1500mm)

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>25</b> 250mA 3498 Lm - 22.7W  <b>55H</b> 550mA 7695 Lm - 49.9W	<b>O</b> Opal Diffuser	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>S</b> RAL9006  <b>Z</b> Custom	<b>E3</b> Standard 3 Hour  <b>ED</b> DALI/EMPRO  <b>ES</b> Self-Test  <b>EW</b> 3 hour DALI Wireless Sentinel

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
Values based on 4000K Colour temperature.

Example Code: VERSO152504KAIWE3


## Luminaire Order Builder

### VERSO18 (1800mm)

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>25</b> 250mA 4897 Lm - 31.7W  <b>55H</b> 550mA 10774 Lm - 69.8W	<b>O</b> Opal Diffuser	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>S</b> RAL9006  <b>Z</b> Custom	<b>E3</b> Standard 3 Hour  <b>ED</b> DALI/EMPRO  <b>ES</b> Self-Test

All electrical and optical data subject to ±10% tolerances.  
Values based on 4000K Colour temperature.

Example Code: VERSO18-25-O-4K-A1-W-E3

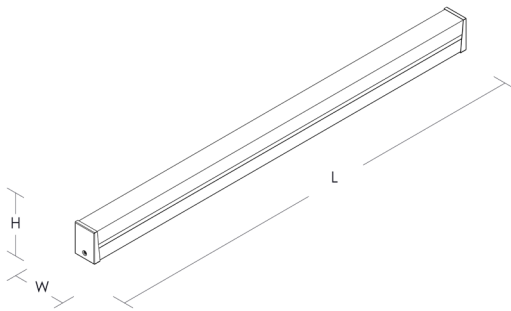

#### Dimensions

L	W	H	Finish	Code	Colour Swatch
1150	53	74	White	9016	
1430	53	74	Black	9005	
1710	53	74	Silver	9006	
			Custom*	Custom*	

All dimensions are measured in millimetres (mm)

\*Custom Colours upon request

