


# P&A



# SABRE

## Suspended/Surface

SABRE is a suspended/surface cylindrical linear product, with high performance opal diffuser providing uniform illumination, profile dimension of 60mmØ x 1000mm or 1500mm.

- Efficacy of up to 130 lm/W.
- Colour temperatures: 3000°k or 4000°k.
- Colour Finishes: Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control option: Casambi.
- Maximum 1m wire suspension kit and mounting bracket supplied as standard.
- Custom length wire suspension, Clear, Black or White flex are also available.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3hr Dali Wireless Sentinel.

### Technical

Product	SABRE
Mounting type	Suspended/Surface
Standard Lengths	1000mm 1500mm
Lumen	Up to 5401 Lm
Efficacy	Up to 130 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Remote Emergency	3 hour, DALI, Self-Test, DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

P&A

Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT  
01704 891333  
sales@pandaprojects.co.uk  
www.pandaprojects.co.uk

Datasheet Code: PA-10834-0

CE BS EN60598-1:2015  
ISO 9001 Certification

MADE IN BRITAIN

## Luminaire Order Builder SABRE10 (1000mm)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>SF</b> Surface	<b>35</b> 350mA 1955 Lm - 16.2W	<b>O</b> Opal Diffuser	<b>3K</b> 3000K	<b>FO</b> Fixed Output	<b>S</b> RAL9006	<b>E3</b> Standard 3 Hour
<b>WS</b> Wire Suspended	<b>40</b> 400mA 2234 Lm - 18.5W					
	<b>45</b> 450mA 2513 Lm - 20.8W					
	<b>50</b> 500mA 2789 Lm - 22.5W					
	<b>55</b> 500mA 3067 Lm - 25W					
	<b>60</b> 600mA 3346 Lm - 27W					
	<b>65</b> 650mA 3601 Lm - 29.4W					

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
Values based on 4000K Colour temperature and DALI driver.

Example Code: SBRI03504KA1W


## SABRE15 (1500mm)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>SF</b> Surface	<b>35</b> 350mA 2932 Lm - 24W	<b>O</b> Opal Diffuser	<b>3K</b> 3000K	<b>FO</b> Fixed Output	<b>S</b> RAL9006	<b>E3</b> Standard 3 Hour
<b>WS</b> Wire Suspended	<b>40</b> 400mA 3351 Lm - 28W					
	<b>45</b> 450mA 3770 Lm - 31W					
	<b>50</b> 500mA 4183 Lm - 34W					
	<b>55</b> 500mA 4601 Lm - 37W					
	<b>60</b> 600mA 5020 Lm - 40W					
	<b>65</b> 650mA 5401 Lm - 43W					

All electrical and optical data subject to  $\pm 10\%$  tolerances.  
Values based on 4000K Colour temperature and DALI driver.

Example Code: SBRI53504KA1W

# P&A SABRE

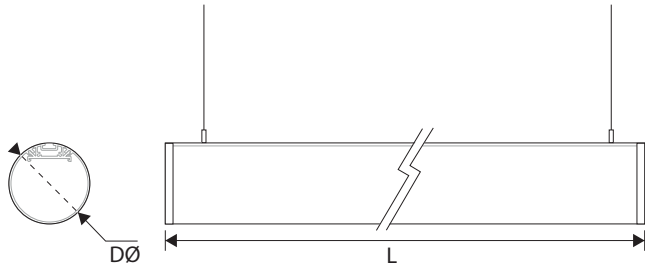

## Dimensions

L	DØ
1000	60
1500	60
Custom*	60

## Finish


RAL	Code	Colour Swatch
Black	9005	
Silver	9006	
Custom*	Custom*	

All dimensions are measured in millimetres (mm)  
\*Custom Lengths up to max 2000mm available upon request

\*Custom end cap Colours upon request

## Ancillaries images

Slimline rectangle ceiling rose

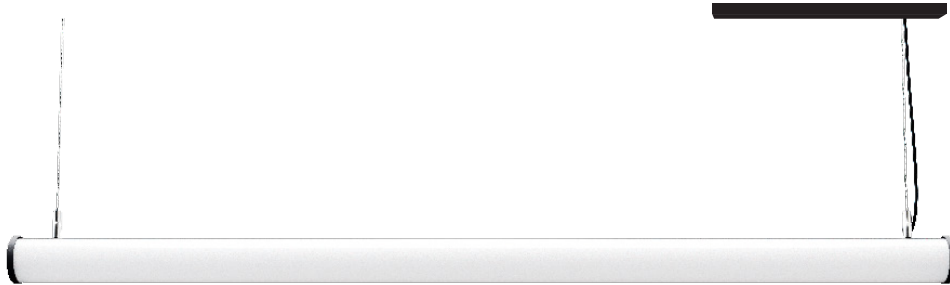

**IP20**  
IP20  
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



**Safety Class**  
Class 1 Safety, chassis is connected to earth with a separate terminal, instead of via the mains cable



**Warranty**  
5 year Guarantee



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT  
01704 891333  
sales@pandaprojects.co.uk  
www.pandaprojects.co.uk

Datasheet Code: PA-10834-0

CE BS EN60598-1:2015  
ISO 9001 Certification

