



3K 4K 65K

IP65



EM3

IK10



SHK

Wall Mounted

SHK is an exterior modern, minimalist bulkhead luminaire, with IP65, IK10 impact resistant housing. Ideal for a wide range of applications, such as building, accent, or perimeter lighting. Available in Large or Midi version.

- Efficacy of up to 140 lm/W.
- IP65 and IK10 resistant housing.
- Versions: Large Body or Midi available.
- Optics: Open Area Lens or Asymmetric.
- Die cast aluminium housing with Polycarbonate diffuser.
- Colour temperatures: 3000°k, 4000°k or 6500°k*.
- Colour Finishes: Anthracite (7016), Black (9005) or grey White (9002) as standard.
- Fixed output as standard.
- Emergency options: Standard 3hr.
- Rear or side cable entry points as standard.
- Suitable for conduit and BESA box installations.
- Integrated options: Photocell or Microwave sensor available upon request.*

Technical

Product	SHK
Mounting type	Wall Mounted
Standard Sizes	Large Midi
Lumen	950 - 3487 Lm
Efficacy	Up to 140 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K) Cool White (6.5K)*
Optics	Open Area Lens Asymmetric
Control	Fixed output
Emergency	3 hour
Rendering	Ra80+
IP Rating	IP65
Safety Class	Class 1
IK Rating	IK08
MacAdam	SDCM 5

* Please contact P&A Technical Department for assistance
** Only available in large version only.

Luminaire Order Builder

SHK-L (Large Version)

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 6. Options	STEP 7. Emergency
35 350mA 1757Lm- 12.6W	OA Open Area Lens	34K 3000K/4000K CCT changeable	FO Fixed Output	A RAL7016	MW Microwave sensor	E3 Standard 3 Hour
50 500mA 2453Lm- 17.7W	AS Asymmetric Lens	65K 6500K		G RAL9002	PC Photocell	
72 725mA 3487Lm- 26.4W				B RAL9005		

All electrical and optical data subject to ±10% tolerances.
Values based on 4000K Colour temperature with Open Area Lens.



Example Code: SHK350A34KFOAE3

SHK-M (Midi Version)

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 6. Options	STEP 7. Emergency
20 200mA 950Lm- 8W	OA Open Area Lens	34K 3000K/4000K CCT changeable	FO Fixed Output	A RAL7016	MW Microwave sensor	E3 Standard 3 Hour
25 500mA 1150Lm- 10W	AS Asymmetric Lens			B RAL9005	PC Photocell	
30 300mA 1400Lm- 13W						
35 350mA 1550Lm- 13W						

All electrical and optical data subject to ±10% tolerances.
Values based on 4000K Colour temperature with Open Area Lens.

Example Code: SHKM200A34KFOA

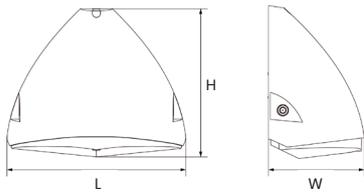

Dimensions


L	W	H	Finish	Code	Colour Swatch
319	165	265	Anthracite	7016	
260	214	136.5	Grey White	9002	
			Black	9005	

All dimensions are measured in millimetres (mm)

Ancillary diagram

CCT switch

3000K/4000K



IP65
Protection against dust and solid objects. Water jets from any angle (2.5mm nozzle)



Safety Class
Class 1 Safety, chassis is connected to earth with a separate terminal, instead of via the mains cable



IK10
IK rating
Protected against 20 joules impact. Equivalent to impact of 5kg mass dropped from 400mm above surface.



Warranty
5 year Guarantee