



3K

4K

IP20



Image shown with optional flex**

GLOBE

Pendant

GLOBE is a decorative LED pendant luminaire. It can be used for general lighting or can be installed as a group to create feature.

- Efficacy of up to 152 lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request*.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Supplied in PMMA as standard.
- Globe supplied with ceiling rose as standard (excluding flex**).
- Optional Flex available, In 3-5 core, Clear, Black or White as standard. Custom colours and lengths available upon request.
- Emergency not available.

Technical

Product	GLOBE
Mounting type	Pendant
Diameters	300mm 400mm
Lumens	2245 - 3822 lm
Efficacy	Up to 152 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal PMMA diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

* Monks cap and Ceiling rose only.

**Excluding flex, see page 3 for flex options.

Luminaire Order Builder

GL3 (300mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
35 350mA 2245 Lm -15.3W 40 400mA 2573 Lm -16.8W 45 500mA 2894 Lm -18.9W 50 500mA 3170 Lm -21.4W	O Opal Diffuser PMMA	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016M B RAL9005 S RAL9006 Z Custom	- Not Available

All electrical and optical data subject to $\pm 10\%$ tolerances. Values based on 4000K Colour temperature and fixed output driver.


Example Code: GL34004KA1W

GL4 (400mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
50 500mA 2989 Lm -20.6W 55 550mA 3287 Lm -22.6W 60 600mA 3442 Lm -24.4W 65 650mA 3728Lm -26.4W 70 700mA 3822 Lm -27.6W	O Opal Diffuser PMMA	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016M B RAL9005 S RAL9006 Z Custom	- Not Available

All electrical and optical data subject to $\pm 10\%$ tolerances. Values based on 4000K Colour temperature and DALI driver.

Example Code: GL46004KA1W

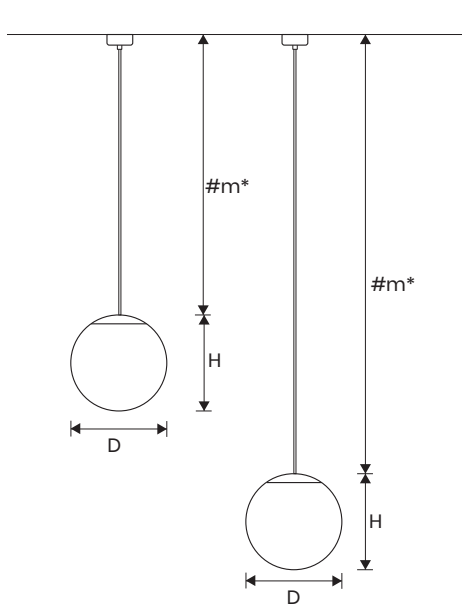

Dimensions

D Ø	H Ø
300	300
400	400

All dimensions are measured in millimetres (mm)
*Custom lengths available upon request

Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Silver	9006	
Custom*	Custom*	

*Custom Colours upon request
Monks cap & Ceiling Rose only

Ancillaries

Wire Suspensions	Code
3m Wire suspension kit	GL-WS-3M
Custom length (1m increments)	GL-WS-#M

Clear 0.75mm ² , Supply Cable	Code
3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-#M
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-#M

Black 0.75mm ² , Supply Cable	Code
3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-#M
5 core, Clear, 3m	FL-5C-B-3M
5 core, Clear, Custom Length*	FL-5C-B-#M

White 0.75mm ² , Supply Cable	Code
3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-#M
5 core, Clear, 3m	FL-5C-W-3M
5 core, Clear, Custom Length*	FL-5C-W-#M

*Please replace Z with required cut meter length.

Ancillaries images

CR75 Ceiling Rose

