



3K

4K

IP20



Image shown with optional flex**

AMPHOR

Pendant

AMPHOR is a elegant and decorative LED pendant luminaire. With its teardrop shape it creates the perfect illumination for your office break out spaces. It can be used for general lighting or can be installed as a group to create feature.

- Efficacy of up to 143lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request*.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Supplied in PMMA as standard.
- Globe supplied with ceiling rose as standard (excluding flex**).
- Optional Flex available, In 3-5 core, Clear, Black or White as standard. Custom colours and lengths available upon request.
- Emergency not available.

Technical

Product	AMPHOR
Mounting type	Pendant
Diameter	300mm 400mm
Lumens	2065 - 3871 lm
Efficacy	Up to 143 Lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal PMMA diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

* Monks cap and Ceiling rose only.

**Excluding flex, see page 3 for flex options.

Luminaire Order Builder

AMP3 (300mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
40 400mA 2065 Lm -14.3W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	- Not Available
45 450mA 2360 Lm -16.3W		4K 4000K	A1 DALI 1-100%	B RAL9005	
50 500mA 2655 Lm -18.7W		A2 DSI	S RAL9006		
55 550mA 2950 Lm -21.3W		A3 Switch Dim	Z Custom		
			A4 1-10v		
			A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances. Values based on 4000K Colour temperature.

Example Code: AMP340O4KA1W


AMP4 (400mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Emergency
50 500mA 2945 Lm -20.7W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	- Not Available
55 550mA 3179 Lm -22.4W		4K 4000K	A1 DALI 1-100%	B RAL9005	
60 600mA 3468 Lm -24.5W		A2 DSI	S RAL9006		
65 650mA 3595 Lm -25.7W		A3 Switch Dim	Z Custom		
70 700mA 3871 Lm -27.7W		A4 1-10v			
			A5 Casambi		

All electrical and optical data subject to $\pm 10\%$ tolerances. Values based on 4000K Colour temperature and DALI driver.

Example Code: AMP460O4KA1W

P&A AMPHOR

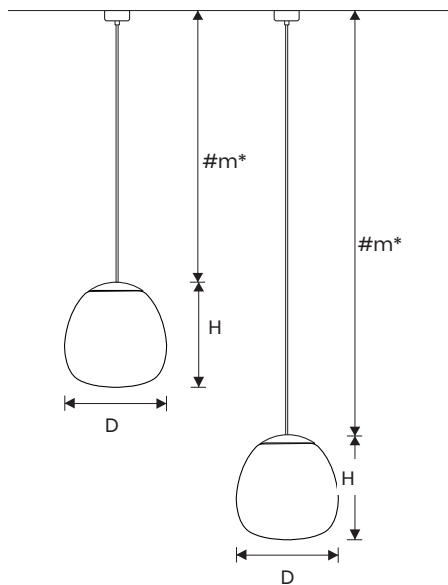

Dimensions

D Ø	H Ø
300	300
400	400

All dimensions are measured in millimetres (mm)
*Custom lengths available upon request

Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Silver	9006	
Custom*	Custom*	

*Custom Colours upon request
Monks cap & Ceiling Rose only

Ancillaries

Wire Suspensions	Code
3m Wire suspension kit	GL-WS-3M
Custom length (1m increments)	GL-WS-#M
Clear 0.75mm², Supply Cable	
3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-#M
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-#M
Black 0.75mm², Supply Cable	
3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-#M
5 core, Clear, 3m	FL-5C-B-3M
5 core, Clear, Custom Length*	FL-5C-B-#M
White 0.75mm², Supply Cable	
3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-#M
5 core, Clear, 3m	FL-5C-W-3M
5 core, Clear, Custom Length*	FL-5C-W-#M

*Please replace Z with required cut meter length.

Ancillaries images

