





Open version



Eyelid version



DT

Wall Mounted

DT is a circular, IP65, IK10, robust, bulkhead luminaire with light pollution reducing eyelid cover, manufactured from cast aluminium with polycarbonate diffuser. Suitable for walkways, building perimeters, passageways, storage areas, car parks and building entrances.

- Efficacy of up to 135 lm/W.
- Colour temperatures: 3000°k and 4000°k as standard.
- Optics: Opal Polycarbonate, with open cover as standard, Eyelid cover or Mesh cover also available.
- Optional: Slimline version available*.
- Colour Finishes: Grey or Black available.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3hr Dali Wireless Sentinel.

Technical

Product	DT
Mounting type	Wall Mounted
Lumens	1486 - 2472 Lm
Efficacy	Up to 135 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Eyelid Open Opal Mesh Opal
Control	DALI 1-100%, DSI, Casambi, Bluetooth, Fixed output,
Emergency	3 hour, DALI, Self-Test, DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP65
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

* Please contact technical department for more details.


Luminaire Order Builder

DT

STEP 1. Select Current	STEP 2. Optic	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Options	STEP 7. Emergency
35 350mA 1486Lm- 11.2W	EY Eyelid Opal Diffuser	3K 3000K	FO Fixed Output	G Grey	M* Microwave Sensor	E3 Standard 3 Hour
40 400mA 1701Lm- 12.7W	OP Open Opal Diffuser	4K 4000K	A1 DALI 1-100% Dim	B Black		ED DALI/EMPRO
45 450mA 1896Lm- 14.2W	MO Mesh Opal Diffuser		A2 DSI			ES Self-Test
50 500mA 2064Lm- 15.5W			A3 Switch Dim			EW 3 hour DALI Wireless Sentinel
55 550mA 2259Lm- 17W			A5 Casambi			
60 600mA 2472Lm- 18.7W						

All electrical and optical data subject to ±10% tolerances.
Values based on 4000K Colour temperature and Open diffuser.

Example Code: DT60OP4KA1BE3

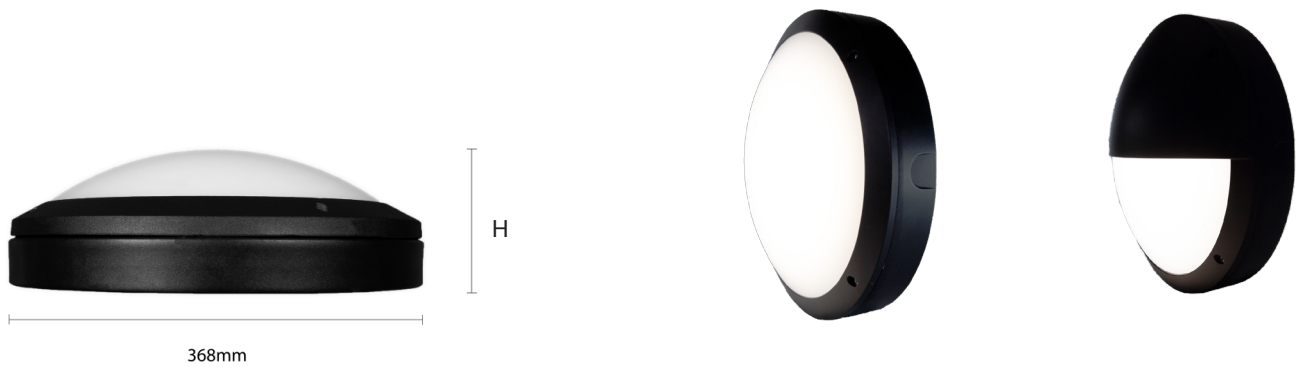

Dimensions

DØ	H	RAL	Code	Colour Swatch
368	146	Grey	G	
368	171*	Black	B	

All dimensions are measured in millimetres (mm)
* Eyelid version only

Finish

IP65	IP65 Protection against dust and solid objects; Water jets from any angle (12.5mm nozzle)		Safety Class Class 1 Safety; chassis is connected to earth with a separate terminal, instead of via the mains cable		Warranty 5 year Guarantee
-------------	--	--	--	--	------------------------------