




3K

4K

IP20



EM3

CLDL

Surface

CLDL is a high performance surface mounted polycarbonate luminaire with lockable hinged cover for easy maintenance. Suitable for a range of applications, including offices, healthcare and schools. Supplied in a variety of outputs to suit your needs.

- Efficacy of up to 142 lm/W.
- Colour temperatures: 3000°k, 4000°k.
- Colour Finishes: White as standard.
- Maintenance: Hinged front cover.
- Rear or side cable entry.
- Dimming options: DALI 1-100% Dim
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3Hr Dali Wireless Sentinel.

Technical

Product	CLDL
Mounting type	Surface
Standard Lengths	1500mm
Lumen	3562 - 6196 Lm
Efficacy	Upto 142 Lm
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, Casambi, Fixed output,
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K


Luminaire Order Builder

CLDL

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 6.	STEP 8.
Select Current	Optics	CCT	Control	Finish	Emergency
20 200mA 3563 Lm - 26W 25 250mA 4450 Lm - 32W 30 300mA 5329 Lm - 38W 35 350mA 6196 Lm - 44W	O Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A5 Casambi	W White	E3 Standard 3 Hour ED DALI/EMPRO ES Self-Test EW 3 hour DALI Wireless Sentinel

All electrical and optical data subject to $\pm 10\%$ tolerances.
Values based on 4000K Colour temperature.

Example Code: CLDL3504KA1WE3

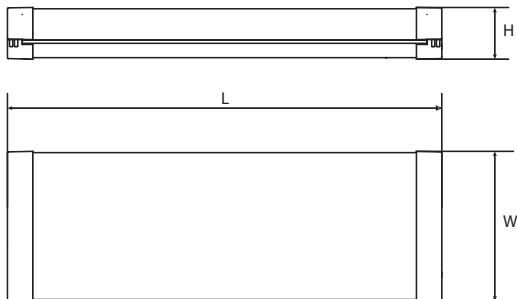

Dimensions

L	W	H	RAL	Code	Colour Switch
1500	207	71	White	White	<input type="text" value=""/>

Finish

All dimensions are measured in millimetres (mm)



IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm.



Safety Class
Class 1 Safety chassis is connected to earth with a separate terminal, instead of via the mains cable.



Warranty
5 year Guarantee