

GLOBE-Acoustic

Pendant

Globe-Acoustic is an sound absorbing architectural pendant luminaire. Opal PMMA diffuser combined with a Acoustic Class A, fabric raft.

- Efficacy of up to 140 lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request*.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Supplied in PMMA as standard.
- Globe supplied with ceiling rose as standard (excluding flex**).
- Supplied with adjustable support wires and individual mounting brackets as standard.
- Optional Flex available, In 3-5 core, Clear, Black or White as standard. Custom colours and lengths available upon request.
- Acoustic diameters: 800mmØ Or 1200mmØ rafts.
- Acoustic Performance: Class A/ NRC 0.95.
- Acoustic Fabrics: Fine texture or Coarse texture.
- Emergency not available.

Technical

Product	GLOBE-Acoustic
Mounting type	Pendant
Diameters	300mm 400mm
Lumens	1603 - 3822 lm
Efficacy	Up to 140 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal PMMA diffuser
Acoustic raft Diameters	800mmØ x 40mm 1200mmØ x 40mm
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

Luminaire Order Builder

GL3-Acoustic (300mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Acoustic Fabric*	STEP 7. Emergency
25 250mA 1603 Lm -11W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	8F 800mm Acoustic Raft Fine Texture	-
30 300mA 1924 Lm -13.1W						
35 350mA 2245 Lm -15.3W						
40 400mA 2573 Lm -16.8W						
			A1 DALI 1-100%	B RAL9005	8C 800mm Acoustic Raft Coarse Texture	
			A2 DSI	S RAL9006	12F 1200mm Acoustic Raft Fine Texture	
			A3 Switch Dim	Z Custom	12C 1200mm Acoustic Raft Coarse Texture	
			A4 1-10v			
			A5 Casambi			

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature and fixed output driver.
*Please see last page for fabric colour options.

Example Code: GL3AC4004KA1W

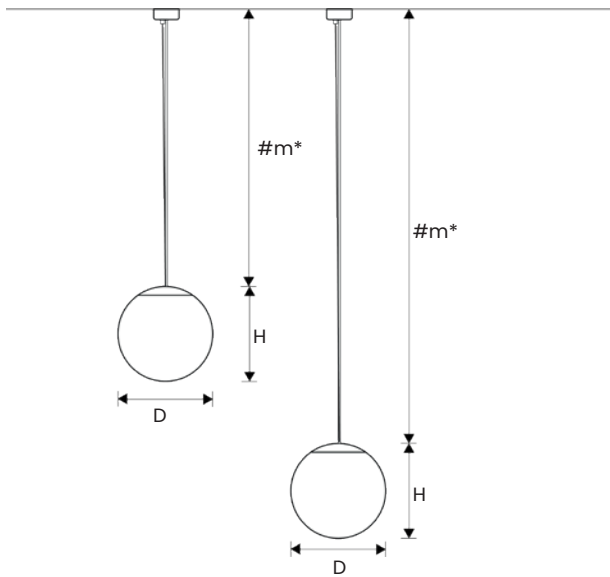
GL4-Acoustic (400mmØ)

STEP 1. Select Current	STEP 2. Optics	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Acoustic Fabric*	STEP 7. Emergency
50 500mA 2868 Lm -20.3W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	8F 800mm Acoustic Raft Fine Texture	-
55 550mA 3155 Lm -22.3W						
60 600mA 3442 Lm -24.4W						
65 650mA 3549 Lm -25.6W						
70 700mA 3822 Lm -27.6W						
			A1 DALI 1-100%	B RAL9005	8C 800mm Acoustic Raft Coarse Texture	
			A2 DSI	S RAL9006	12F 1200mm Acoustic Raft Fine Texture	
			A3 Switch Dim	Z Custom	12C 1200mm Acoustic Raft Coarse Texture	
			A4 1-10v			
			A5 Casambi			

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature and DALI driver.
*Please see last page for fabric colour options.

Example Code: GL4AC6004KA1W

P&A GLOBE-Acoustic



Dimensions

D Ø	H Ø
300	300
400	400

All dimensions are measured in millimetres (mm)
*Custom lengths available upon request

Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Silver	9006	
Custom*	Custom*	

*Custom Colours upon request
Monks cap & Ceiling Rose only

Ancillaries

Wire Suspensions	Code
3m Wire suspension kit	GL-WS-3M
Custom length (1m increments)	GL-WS-#M
Clear 0.75mm², Supply Cable	
3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-#M
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-#M
Black 0.75mm², Supply Cable	
3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-#M
5 core, Clear, 3m	FL-5C-B-3M
5 core, Clear, Custom Length*	FL-5C-B-#M
White 0.75mm², Supply Cable	
3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-#M
5 core, Clear, 3m	FL-5C-W-3M
5 core, Clear, Custom Length*	FL-5C-W-#M



































*Please replace Z with required cut meter length.

Ancillaries images



P&A GLOBE-Acoustic

Acoustic Fabric colour options

Fine Texture					Coarse Texture				
									
Off White Coarse Texture	Red Coarse Texture	Light Green Coarse Texture	Grey Coarse Texture	Light Grey Coarse Texture	White Fine Texture	Red/Orange Fine Texture	Light Green Fine Texture	Dark Teal Fine Texture	Light Blue Fine Texture
									
Sand Coarse Texture	Yellow Coarse Texture	Green Coarse Texture	Lead Grey Coarse Texture		Sand Fine Texture	Yellow Fine Texture	Green Fine Texture	Navy Blue Fine Texture	
									
Grey Coarse Texture	Deep Red Coarse Texture	Teal Coarse Texture	Dark Grey Coarse Texture		Grey Fine Texture	Deep Red Fine Texture	Teal Fine Texture	Blue Fine Texture	
									
Black Coarse Texture	Dark Blue Coarse Texture	Navy Blue Coarse Texture	Light Blue Coarse Texture		Black Fine Texture	Dark Purple Fine Texture	Purple Fine Texture	Blue Grey Fine Texture	

IP20
IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
5 year Guarantee



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

Datasheet Code: **PA-10179-10**

UK CA CE BS EN60598-1:2015
ISO 9001 Certification

