


27K

3K

4K

IP20



24V



VODE

Recessed

VODE is a slimline linear LG7 UGR<19, 24V dark light luminaire, with its unique compact design, and quick tool free cable connectors, provides efficiencies of up to 183lm/W.

- Efficacy of up to 183 lm/W.
- Colour temperatures: 2700°k, 3000°k and 4000°k as standard.
- Colour Finishes: White (9016) or Black (9005) Louvre & bevel finishes as standard.
- Available in 7 pocket modules.
- Dimming option: DALI 1-100%.
- Wireless control options: Casambi.
- Quick Installation with plug and play connectors.
- Run upto 15 fitting from a single 150W remote driver.
- CRI95 as Standard.

Technical

Product	VODE
Mounting type	Recessed
Lumens	Upto 1500 Lm
Efficacy	Up to 183 Lm/W
Colour Temperature	Soft White (27K) Warm White (3K) Neutral White (4K)
Optics	Clear diffuser Opal diffuser
Beam Angle	35° 50° 80°
Dimming	24V DALI 1-100%, Fixed Output, Casambi
Emergency	Not Available
Rendering	Ra95
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K


Luminaire Order Builder

VODE

STEP 1. Select Wattage	STEP 2. Optics	STEP 3. Beam	STEP 4. CCT	STEP 5. Control	STEP 6. Bezel	STEP 7. Reflector	STEP 8. Emergency
8 8W/m - 24V 1500 Lm/m	C Clear Diffuser	35 35° Degree beam	27K 2700K	FO Fixed Output	W RAL9016	WR White Reflector	- Not Available
	O Opal Diffuser	50 50° Degree beam	3K 3000K	A1 DALI 1-100% Dim	B RAL9005	BR Black Reflector	
		80 80° Degree beam	4K 4000K	A5 Casambi			

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature, CRI90, Clear Diffuser and Black louvre.

Example Code: VD8C503KA1BBR

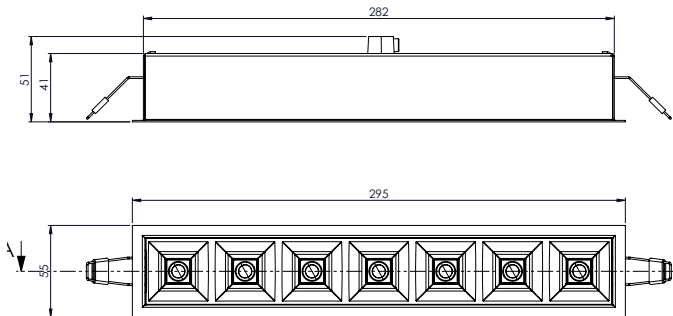

Dimensions


L	W	H	Finish	Code	Colour Swatch
295	55	41 (51 Inc Cable restraint)	White	9016M	
			Black	9005	

All dimensions are measured in millimetres (mm)
Ceiling cutout = 285x45mm

Plug & Play System Architecture

Max 12m.

Upto 12m maximum run using plug & play connectors.

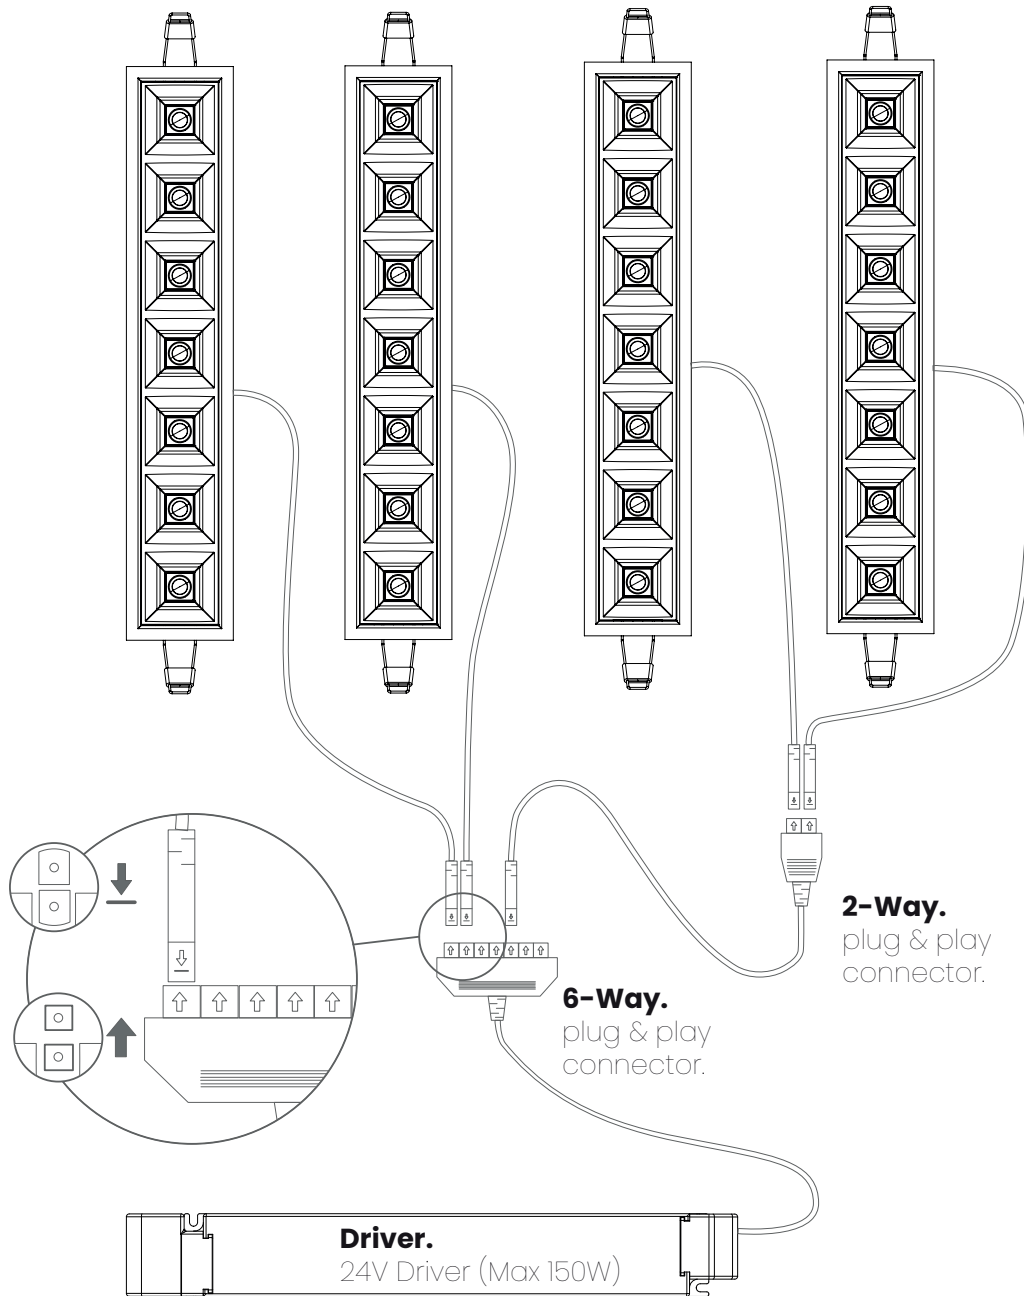

IP20

IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 1 Safety, chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
5 year Guarantee