
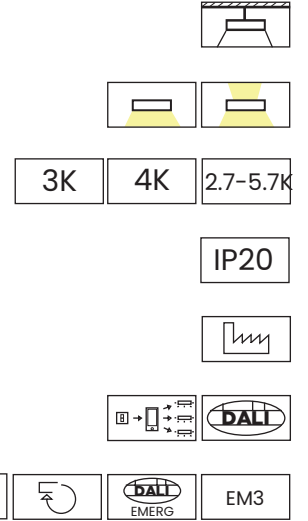


P&A

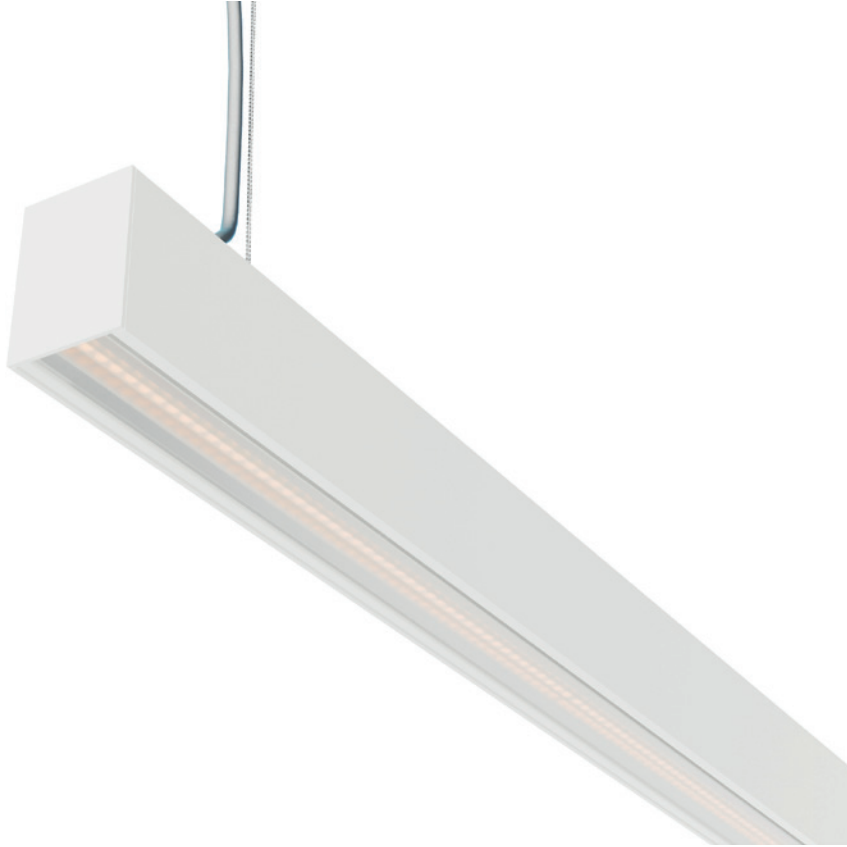

SubSpace ASY

Suspended

Subspace Asymmetric is a suspended linear architectural luminaire, manufactured from extruded aluminium. Supplied as Direct or Direct/Indirect, in standard or custom lengths, with a variety of optics to suit your needs.

- Efficacy of up to 162 lm/W.
- Colour temperatures: 3000°k, 4000°k or Tunable White (2700°k -5700°k).
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v, DALI 10-100% Dim.
- Wireless control options: Casambi.
- Industry driver options: Fixed output or Dali dimming, for extended service life.
- 3m wire suspension kit and mounting bracket supplied as standard.
- Custom length wire suspension, Clear, Black or White flex are also available.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3Hr Dali Wireless Sentinel.
- Integrated PIR available upon request*.

Technical

Product	SubSpace ASY
Mounting type	Suspended
Standard Lengths	870-2970mm
Custom Lengths	140mm increments
Lumen/M	1700-7300 Lm/M
Efficacy	Up to 162 Lm/W
Colour Temperature	Warm White (3K) Neutral White (4K) Tunable White (2.7K >5.7K)
Optics	Asymmetric
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output, Industry DALI, Industry Fixed Output, DALI 10-100%
Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>75K

* Please contact P&A Technical Department for assistance

P&A

Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

Datasheet Code: PA-10430-0

UK CA CE BS EN60598-1:2015
ISO 9001 certification

MADE IN BRITAIN

P&A SubSpace ASY

Luminaire Order Builder SS-WS (Direct)

STEP 1. Select Size	STEP 2. Current	STEP 3. Direction	STEP 4. Optics	STEP 5. Length	STEP 6. CCT	STEP 7. Control	STEP 9. Finish	STEP 10. Emergency
50 49mm Wide	15 150mA 1700 Lm/M - 12W/m	D Direct	ASY Asymmetric Diffuser	870 870mm	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
70 73mm Wide	20 200mA 2200Lm/M - 14W/m			1150 1150mm	4K 4000K	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
	25 250mA 2800Lm/M - 17W/m			1430 1430mm	TW 2700K - 5700K Tunable white	A2 DSI	S RAL9006	ES Self-Test
	30 300mA 3300 Lm/M - 21W/m			1710 1710mm		A3 Switch Dim	Z Custom	EW 3 hour DALI Wireless Sentinel
	35 350mA 3800Lm/M - 24W/m			1990 1990mm		A4 1-10v		
	40 400mA 4300Lm/M - 27W/m			2270 2270mm		A5 Casambi		
				2550 2550mm		A6 Industry Fixed Output		
				2970 2970mm		A7 Industry DALI		
				XXXX Insert custom length (mm)		A8 DALI 10-100% Dim		

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature.

Example Code: SS50WS15DASY11504KA1WE3

SS-WS (Direct/Indirect)

STEP 1. Select Size	STEP 2. Current	STEP 3. Direction	STEP 4. Optics	STEP 5. Length	STEP 6. CCT	STEP 7. Control	STEP 9. Finish	STEP 10. Emergency
50 49mm Wide	15 150mA 2800 Lm/M - 20W/m	DI Direct/indirect	ASY Asymmetric Diffuser	870 870mm	3K 3000K	FO Fixed Output	W RAL9016M	E3 Standard 3 Hour
70 73mm Wide	20 200mA 3700 Lm/M - 25W/m			1150 1150mm	4K 4000K	A1 DALI 1-100% Dim	B RAL9005	ED DALI/EMPRO
	25 250mA 4600 Lm/M - 31W/m			1430 1430mm	TW 2700K - 5700K Tunable white	A2 DSI	S RAL9006	ES Self-Test
	30 300mA 5600 Lm/M - 36W/m			1710 1710mm		A3 Switch Dim	Z Custom	EW 3 hour DALI Wireless Sentinel
	35 350mA 6400 Lm/M - 42W/m			1990 1990mm		A4 1-10v		
	40 400mA 7300 Lm/M - 48W/m			2270 2270mm		A5 Casambi		
				2550 2550mm		A6 Industry Fixed Output		
				2970 2970mm		A7 Industry DALI		
				XXXX Insert custom length (mm)		A8 DALI 10-100% Dim		

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature.

Example Code: SS50WS15DIASY11504KA1WE3





Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

Datasheet Code: PA-10430-0

UK CA CE BS EN60598-1:2015
ISO 9001 certification



P&A SubSpace ASY

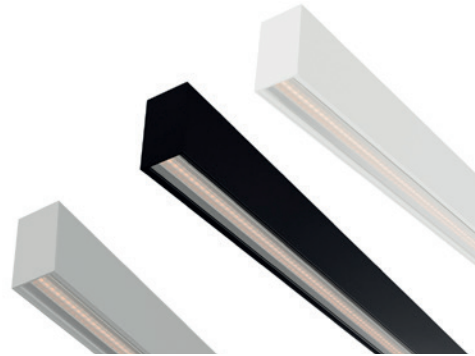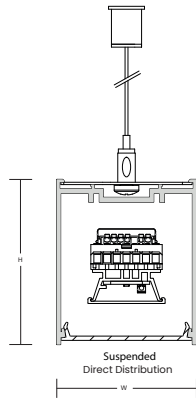

Dimensions

L	W	H
870	49/73	85
1150	49/73	85
1430	49/73	85
1710	49/73	85
1990	49/73	85
2270	49/73	85
2550	49/73	85
2970	49/73	85
Custom*	49/73	85

All dimensions are measured in millimetres (mm).
*Custom lengths upon request.

Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Silver	9006	
Custom*	Custom*	

*Custom Colours upon request.

Ancillaries

Wire Suspensions	Code	Ancillaries images
3m Wire suspension kit	SSXX-WS-3M	3m Wire suspension kit
Custom length (1m increments)	SSXX-WS-ZM	CR75 Decorative Ceiling Rose***

Clear 0.75mm² Supply Cable

3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-ZM
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-ZM
6 core, Clear, 3m	FL-6C-C-3M
6 core, Clear, Custom Length*	FL-6C-C-ZM

Black 0.75mm² Supply Cable

3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-ZM
5 core, Black, 3m	FL-5C-B-3M
5 core, Black, Custom Length*	FL-5C-B-ZM
6 core, Black, 3m	FL-6C-B-3M
6 core, Black, Custom Length*	FL-6C-B-ZM

White 0.75mm² Supply Cable

3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-ZM
5 core, White, 3m	FL-5C-W-3M
5 core, White, Custom Length*	FL-5C-W-ZM
6 core, White, 3m	FL-6C-W-3M
6 core, White, Custom Length*	FL-6C-W-ZM

Decorative Ceiling Rose*** (c/w central hole for single wire suspension fixing).


Silver RAL9006	CR-75-I-S
Black RAL9005	CR-75-I-B
White RAL9016	CR-75-I-W
Custom RAL Colour**	CR-75-I-Z

*Please replace Z with required cut meter length.

**Please replace Z with required Custom RAL Colour.

***Ceiling rose does not include termination point (Termination supplied by others).

Ancillaries images

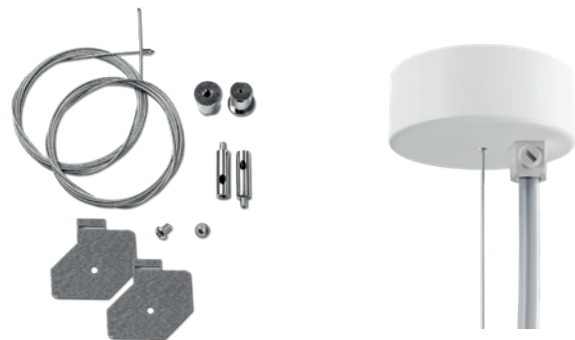

Distribution Types

Direct	Direct/Indirect
--------	-----------------



IP20

IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



5 Year
Guarantee
Warranty
5 year Guarantee



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

Datasheet Code: PA-10430-0



BS EN60598-1:2015
ISO 9001 certification

