




Open version



Eyelid version



# DT

## Wall Mounted

DT is a circular, IP65, IK10, robust, bulkhead luminaire with light pollution reducing eyelid cover, manufactured from cast aluminium with polycarbonate diffuser. Suitable for walkways, building perimeters, passageways, storage areas, car parks and building entrances.

- Efficacy of up to 135 lm/W.
- Colour temperatures: 3000°k and 4000°k as standard.
- Optics: Opal Polycarbonate, with open cover as standard, Eyelid cover also available.
- Optional: Slimline version available\*.
- Colour Finishes: Grey or Black available.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable or 3hr Dali Wireless Sentinel.

### Technical

Product	DT
Mounting type	Wall Mounted
Lumens	1486 - 2472 Lm
Efficacy	Up to 135 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Eyelid Open Opal
Control	DALI 1-100%, DSI, Casambi, Bluetooth, Fixed output,
Emergency	3 hour, DALI, Self-Test, DALI Wireless Sentinel
Rendering	Ra80+
IP Rating	IP65
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

\* Please contact technical department for more details.


## Luminaire Order Builder

### DT

STEP 1. Select Current	STEP 2. Optic	STEP 3. CCT	STEP 4. Control	STEP 5. Finish	STEP 6. Options	STEP 7. Emergency
<b>35</b> 350mA 1486Lm- 11.2W  <b>40</b> 400mA 1701Lm- 12.7W  <b>45</b> 450mA 1896Lm- 14.2W  <b>50</b> 500mA 2064Lm- 15.5W  <b>55</b> 550mA 2259Lm- 17W  <b>60</b> 600mA 2472Lm- 18.7W	<b>EY</b> Eyelid Opal Diffuser  <b>OP</b> Open Opal Diffuser	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A5</b> Casambi	<b>G</b> Grey  <b>B</b> Black	<b>M*</b> Microwave Sensor	<b>E3</b> Standard 3 Hour  <b>ED</b> DALI/EMPRO  <b>ES</b> Self-Test  <b>EW</b> 3 hour DALI Wireless Sentinel

All electrical and optical data subject to ±10% tolerances.  
Values based on 4000K Colour temperature and Open diffuser.

Example Code: DT60OP4KA1BE3

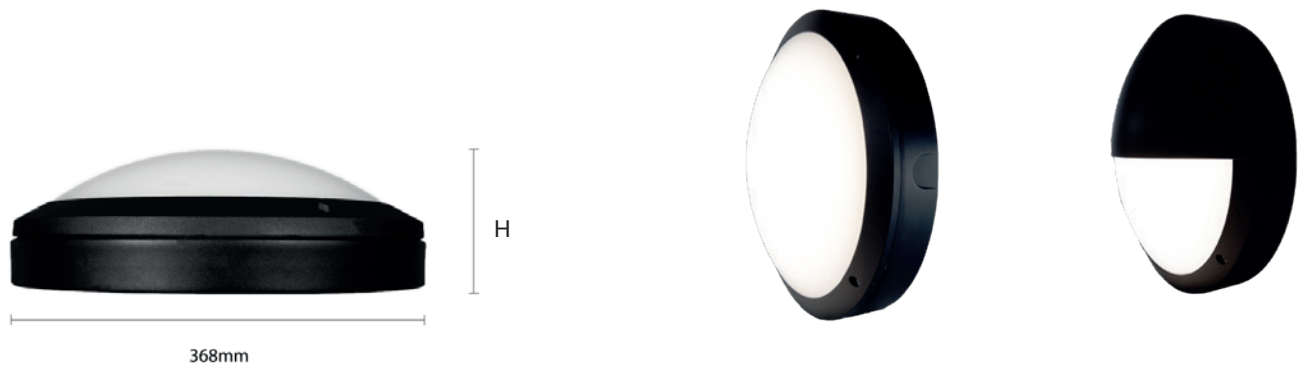

### Dimensions

DØ	H	RAL	Code	Colour Swatch
368	146	Grey	G	
368	171*	Black	B	

All dimensions are measured in millimetres (mm)  
\* Eyelid version only

IP65	IP65 Protection against dust and solid objects, Water jets from any angle (12.5mm nozzle)		Safety Class Class 1 Safety, chassis is connected to earth with a separate terminal, instead of via the mains cable		Warranty 5 year Guarantee
------	--	--	--	--	------------------------------