

GL-TRK

Track

GL-TRK is a decorative LED track mounted pendant luminaire. It can be used for general lighting or can be installed either suspended or direct to track adapter.

- Efficacy of up to 148 lm/W.
- Colour temperatures: 3000°k and 4000°k.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request*.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Supplied in PMMA as standard.
- Optional Flex available, In 3-5 core, Clear, Black or White as standard. Custom colours and lengths available upon request.
- Emergency not available.

Technical

Product	GL-TRK
Mounting type	Track
Diameters	300mm 400mm
Lumens	2084- 2690 lm
Efficacy	Up to 148 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal PMMA diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

Luminaire Order Builder

GL3-TRK(300mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 8. Emergency
T Track Mounted No Flex	35 350mA 2148 Lm -14.4W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	- Not Available
FS Flex suspended	40 400mA 2573 Lm -16.8W		4K 4000K	A1 DALI 1-100%	B RAL9005	
				A2 DSI	S RAL9006	
				A3 Switch Dim	Z Custom	
				A4 1-10v		
				A5 Casambi		

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature and fixed output driver.

Example Code: GL3TRKT35O4KA1W


GL4-TRK (400mmØ)

STEP 1. Select Mounting	STEP 2. Current	STEP 3. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 8. Emergency
T Track Mounted No Flex	35 350mA 2084 Lm -14.8W	O Opal Diffuser PMMA	3K 3000K	FO Fixed Output	W RAL9016M	- Not Available
FS Flex suspended	40 400mA 2382 Lm -16.9W		4K 4000K	A1 DALI 1-100%	B RAL9005	
	45 450mA 2690 Lm -18.5W			A2 DSI	S RAL9006	
				A3 Switch Dim	Z Custom	
				A4 1-10v		
				A5 Casambi		

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature and DALI driver.

Example Code: GL4TRKFS35O4KA1W

PA GL-TRK

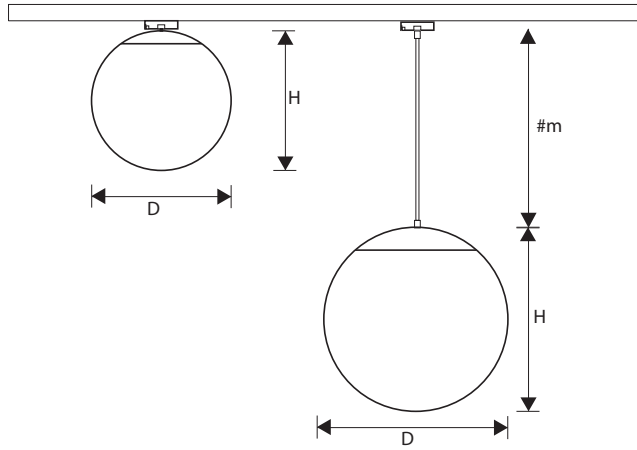

Dimensions

D Ø	H Ø
300	300
400	400

All dimensions are measured in millimetres (mm)
*Custom lengths available upon request

Finish

RAL	Code	Colour Swatch
White	9016M	
Black	9005	
Silver	9006	
Custom*	Custom*	

*Custom Colours upon request
Monks cap only

Ancillaries

Flex Suspensions	Code
Clear 0.75mm², Supply Cable	
3 core, Clear, 3m	FL-3C-C-3M
3 core, Clear, Custom Length*	FL-3C-C-#M
5 core, Clear, 3m	FL-5C-C-3M
5 core, Clear, Custom Length*	FL-5C-C-#M
Black 0.75mm², Supply Cable	
3 core, Black, 3m	FL-3C-B-3M
3 core, Black, Custom Length*	FL-3C-B-#M
5 core, Clear, 3m	FL-5C-B-3M
5 core, Clear, Custom Length*	FL-5C-B-#M
White 0.75mm², Supply Cable	
3 core, White, 3m	FL-3C-W-3M
3 core, White, Custom Length*	FL-3C-W-#M
5 core, Clear, 3m	FL-5C-W-3M
5 core, Clear, Custom Length*	FL-5C-W-#M

*Please replace Z with required cut meter length.



Warranty
5 year Guarantee



Crown House, Plantation Rd, Burscough, Lancashire, L40 8JT
01704 891333
sales@pandaprojects.co.uk
www.pandaprojects.co.uk

Datasheet Code: PA-10088-0

UK CA CE BS EN60598-1:2015
ISO 9001 Certification

