



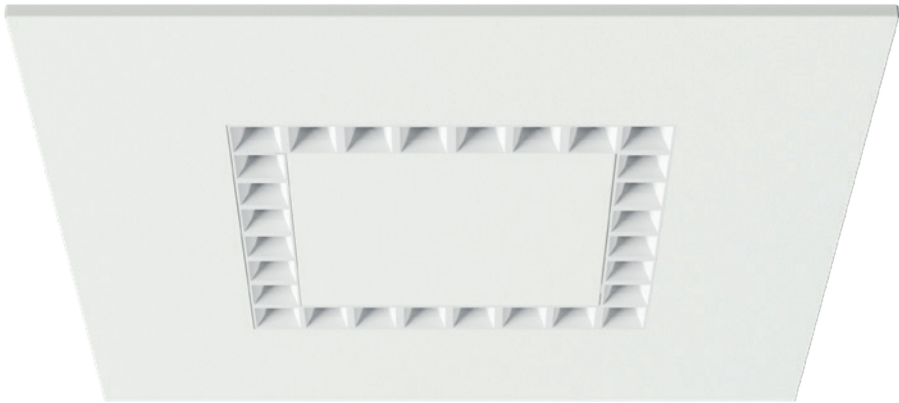

3K 4K 2.7-6.5K

IP20



VODE-TILE

Recessed

Vode Tile is an slimline LG7 UGR<19 luminaire, with its darklight optics combine directional light distribution with a clean modern look, with its compact and quick to install for exposed T ceiling grids. provides efficiencies of up to 162lm/W.

- Efficacy of up to 162 lm/W.
- Colour temperatures: 3000°k, 4000°k or Tunable White (2700°k -6500°k).
- Colour Finishes: White RAL9016 as standard.
- Reflector Finishes: Matt White or Matt Black as standard.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim.
- Wireless control options: Casambi. In remote housing
- Supplied with remote driver.
- Supplied as recessed for exposed T ceilings as standard.
- Fully Remote Emergency options: Standard 3hr, Self-Test or DALI addressable, 3Hr DALI Wireless Sentinel.

Technical


Product	VODE TILE
Mounting type	Recessed
Dimensions	595 x 595mm
Lumens	2699 - 5147 Lm
Efficacy	Up to 162 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K) Tunable White (2.7K > 6.5K)
Optics	Clear Diffuser Opal Diffuser
Beam Angle	50° 80°
Control	DALI 1-100%, DSI, Casambi. Fixed Output
Remote Emergency	3 hour, DALI, Self-Test, 3 hour DALI Wireless Sentinel
Rendering	Ra80
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 4
L70/B10	>50K

Luminaire Order Builder

STEP 1.	STEP 2.	STEP 3.	STEP 4.	STEP 5.	STEP 6.	STEP 7.
Current	Optics	Beam	CCT	Control	Finish	Emergency
10 100mA 2699 Lm ~ 16.6W	C Clear Diffuser	50 50° Degree beam	3K 3000K	FO Fixed Output	WW RAL9016 White Trim & Matt WhiteLouvre	E3 Fully Remote Standard 3 Hour
15 150mA 3993 Lm ~ 25W	O Opal Diffuser	80 80° Degree beam	4K 4000K	A1 DALI 1-100% Dim	WB RAL9016 White Trim & Matt Black Louvre	ED Fully Remote DALI/EMPRO
20 200mA 5147 Lm ~ 34W			TW 2700K - 6500K Tunable white	A2 DSI		ES Fully Remote Self-Test
				A3 Switch Dim		EW Fully Remote 3 hour DALI Wireless Sentinel
				A5 Casambi		

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature, CRI80, Clear Diffuser and Black louvre.

Example Code: VT10C504KA1WWE3

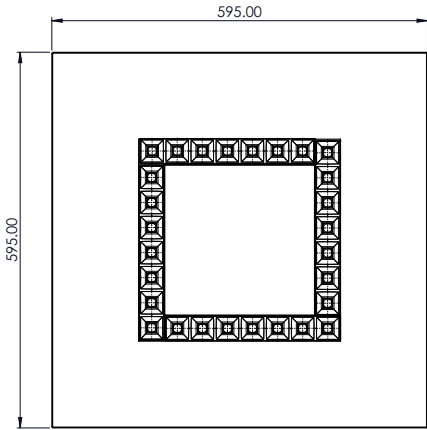

Dimensions

L	W	H	Finish	Code	Colour Swatch
595	595	8.5	White	9016M	

All dimensions are measured in millimetres (mm)

IP20

IP20
Protection of fingers against
access to hazardous parts, and
protection against objects larger
than 12.5mm



Safety Class
Class 1 Safety: chassis is
connected to earth with a
separate terminal, instead of via
the mains cable



Warranty
5 year Guarantee