


3K

4K

IP20



EM3

MADDISON

Wall mounted

MADDISON is a compact modern wall mounted architectural luminaire, Its stylish minimalist form with curved front, provides the perfect balance of form and function for transitional spaces, Supplied as standard with direct/indirect distribution, with a variety of outputs to suit your needs.

- Efficacy of up to 123 lm/W.
- Colour temperatures: 3000°k, 4000°K.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable.

Technical

Product	MADDISON
Mounting type	Wall mounted
Length	362mm
Lumens	1585 - 1811Lm
Efficacy	Up to 123 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	3 hour, DALI, Self-Test
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K


Luminaire Order Builder

MADDISON

STEP 1.	STEP 2.	STEP 4.	STEP 5.	STEP 6.	STEP 7.
Select Current	Optics	CCT	Control	Finish	Emergency
35 350mA 1584 Lm -12.8W 40 400mA 1811 Lm -14.7W	O Opal Diffuser	3K 3000K 4K 4000K	FO Fixed Output A1 DALI 1-100% Dim A2 DSI A3 Switch Dim A4 1-10v A5 Casambi	W RAL9016M B RAL9005 S RAL9006 Z Custom	E3 Standard 3 Hour remote ED DALI/EMPRO remote ES Self-Test remote

All electrical and optical data subject to $\pm 10\%$ tolerances. Values based on 4000K Colour temperature.

Example Code: MDS35O4KA1W

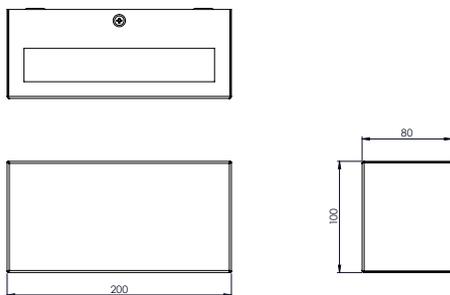

Dimensions

L	W	H	Finish	RAL	Code	Colour Swatch
200	80	100	White	9016		
			Black	9005		
			Silver	9006		
			Custom*	Custom*		

All dimensions are measured in millimetres (mm)

*Custom Colours upon request



IP20
 Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
 Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
 5 year Guarantee