

PUCK

Wall mounted

PUCK is a compact surface mounted architectural sconce luminaire that cast a soft and difuse an ambeint atmospheric glow, Its stylish minimalist form, provides the perfect balance of form and function for transitional spaces.

- Efficacy of up to 84 lm/W.
- Colour temperatures: 2700°k, 3000°k or 4000°K.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Fixed output as standard.
- *Remote Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- *Remote Wireless control options: Casambi.
- Emergency not available.

Technical

Product	PUCK
Mounting type	Wall mounted
Diameter	120mm
Lumens	755Lm
Efficacy	Up to 84 lm/W
Colour Temperature	Warm White (27K)
	Warm White (3K)
	Neutral White (4K)
Optics	Opal diffuser
Control	Fixed output
Emergency	Not Available
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K

* For all dimming options, Drivers need to be mounted remotely only.


Luminaire Order Builder

PUCK

STEP 1.	STEP 2.	STEP 4.	STEP 5.	STEP 6.	STEP 7.
Select Current	Optics	CCT	Control	Finish	Emergency
25 250mA 755 Lm -9W 35 350mA 1041 Lm -12W	O Opal Diffuser	27K 2700K 3K 3000K 4K 4000K	FO Fixed Output A1 Remote DALI 1-100% Dim A2 Remote DSI A3 Remote Switch Dim A4 Remote 1-10v A5 Remote Casambi	W RAL9016M B RAL9005 S RAL9006 Z Custom	Not Available

All electrical and optical data subject to ± 10% tolerances.
Values based on 4000K Colour temperature.

Example Code: PCK35O4KFOB

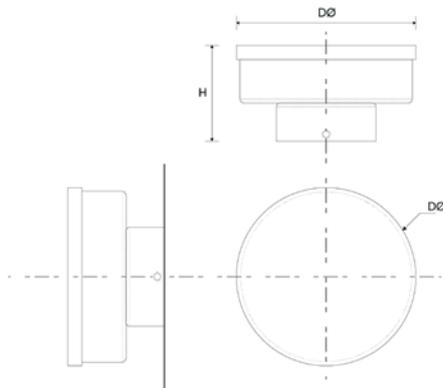

Dimensions

DØ	H	Finish	RAL	Code	Colour Swatch
126	68	White	9016		
		Black	9005		
		Silver	9006		
		Custom*	Custom*		

All dimensions are measured in millimetres (mm)

*Custom Colours upon request



IP20
Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



Safety Class
Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



Warranty
5 year Guarantee