


3K

4K

IP20



EM3

# MADDISON

## Wall mounted

MADDISON is a compact modern wall mounted architectural luminaire, Its stylish minimalist form with curved front, provides the perfect balance of form and function for transitional spaces, Supplied as standard with direct/indirect distribution, with a variety of outputs to suit your needs.

- Efficacy of up to 139 lm/W.
- Colour temperatures: 3000°k, 4000°K.
- Colour Finishes: White (9016), Black (9005) or Silver (9006). Other RAL colours, available on request.
- Dimming options: DALI 1-100% Dim, DSI, Switch Dim, 1-10v.
- Wireless control options: Casambi.
- Emergency options: Standard 3hr, Self-Test, Dali addressable.

### Technical

Product	MADDISON
Mounting type	Wall mounted
Length	200mm
Lumens	1018 - 1163Lm
Efficacy	Up to 139 lm/W
Colour Temperature	Warm White (3K) Neutral White (4K)
Optics	Opal diffuser
Control	DALI 1-100%, DSI, 1-10V, Casambi, Fixed output
Emergency	3 hour, DALI, Self-Test
Rendering	Ra80+
IP Rating	IP20
Safety Class	Class 1
MacAdam	SDCM 3
L70/B10	>50K



## Luminaire Order Builder

### MADDISON

STEP 1. Select Current	STEP 2. Optics	STEP 4. CCT	STEP 5. Control	STEP 6. Finish	STEP 7. Emergency
<b>35</b> 350mA 1018 Lm ~7.3W  <b>40</b> 400mA 1163 Lm ~8.3W	<b>O</b> Opal Diffuser	<b>3K</b> 3000K  <b>4K</b> 4000K	<b>FO</b> Fixed Output  <b>A1</b> DALI 1-100% Dim  <b>A2</b> DSI  <b>A3</b> Switch Dim  <b>A4</b> 1-10v  <b>A5</b> Casambi	<b>W</b> RAL9016M  <b>B</b> RAL9005  <b>S</b> RAL9006  <b>Z</b> Custom	<b>E3</b> Standard 3 Hour remote  <b>ED</b> DALI/EMPRO remote  <b>ES</b> Self-Test remote

All electrical and optical data subject to  $\pm 10\%$  tolerances. Values based on 4000K Colour temperature.

Example Code: MDS35O4KA1W

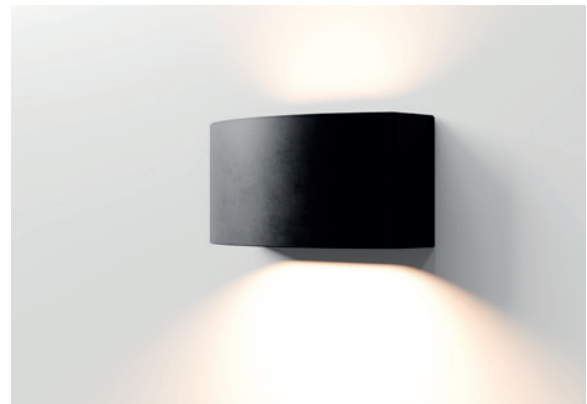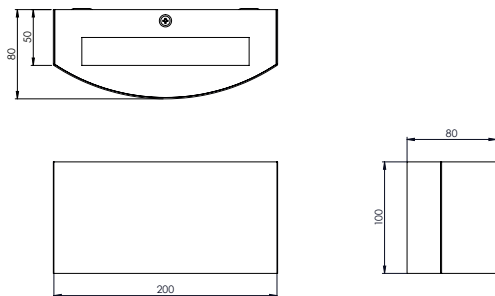

#### Dimensions

L	W	H
200	80	100

#### Finish

RAL	Code	Colour Swatch
White	9016	
Black	9005	
Silver	9006	
Custom*	Custom*	

All dimensions are measured in millimetres (mm)

\*Custom Colours upon request



**IP20**  
 Protection of fingers against access to hazardous parts, and protection against objects larger than 12.5mm



**Safety Class**  
 Class 1 Safety: chassis is connected to earth with a separate terminal, instead of via the mains cable



**Warranty**  
 5 year Guarantee